

TESTING A NEW LISTENING-ROOM

BJARNE LANGVAD, HENRIK MØLLER

Institute of Electronic Systems
Aalborg University Centre

GUSTAW BUŻYŃSKI(*)

Sound Engineering Department, Gdańsk Technical University
(80-952 Gdańsk, ul. W. Majakowskiego 11/12)

New listening-rooms purposely designed and built are relatively seldom described in the literature, nevertheless problems arise especially when assessing their acoustic quality. Such problems are considered on the example of a new listening-room of the Acoustic Laboratory at the Aalborg University in Denmark. Results of the measurements and testing are discussed and some more general conclusions presented.

Nowe pomieszczenia odsłuchowe są stosunkowo rzadko opisywane w literaturze. Problemy związane z oceną ich jakości akustycznej rozpatrzono na przykładzie nowego pomieszczenia odsłuchowego Laboratorium Akustyki na Uniwersytecie w Aalborgu, w Danii. Przedyskutowano wyniki pomiarów i badań testowych oraz przedstawiono bardziej ogólne wnioski.

1. Introduction

Necessity of a high quality listening-room for all professional recording activities is still not sufficiently understood. Sound-engineers mostly listen to their recordings in their control-rooms only. However, many control-rooms in existing studios are either too small in volume or otherwise acoustically defective so that a rigorous assessment of the recordings quality can not be attained therewith. Moreover such an assessment ought very often to be performed by several people simultaneously, among them e.g. a composer, an arranger, a conductor, a producer, a sound-engineer

(*) Active as visiting professor at Aalborg University Centre since September 1987 till March 1988.

etc., while usual control-room can not afford so many seats appropriately situated acoustically.

So, purposely built and equipped listening-room became an unavoidable facility in every bigger professional recording centre, first of all at productional broadcasting-studios. Similar facilities are also needed for other purposes e.g. for psycho-physiological research, for various kinds of subjective aural testing etc., as well as for didactic aims.

However, with growing number of newly built and rebuilt control- or listening-rooms, an important question arises how to test the quality of such rooms. The question will be here partially answered on an example of testing a listening-room at the newly built Acoustic Laboratory in the Institute of Electronic Systems of the Aalborg University Centre in North Jutland, Denmark.

The listening-room has been acoustically designed by JORGEN PEDERSEN from the Scandinavisk Lydteknik, Aalborg [11], together with other special rooms of the Acoustic Laboratory, such as an anechoic-room, a reverberant-chamber, an audiometric-room, an infrasound-booth, etc. subsided by several appropriate control-rooms. The designs were based on assumptions prepared by scientific staff of the Laboratory, in accordance to recommendations mentioned beneath.

2. Objective criteria of the listening-room quality

The objective criteria, selected among more general ones concerning acoustical quality of rooms, are, first of all, contained in various recommendations edited by appropriate national or international bodies, e.g. the Scandinavian Broadcasting Corporations [20, 21], the International Electrotechnical Commission [19], Organisation Internationale de la Radio et Télévision [16, 17], Deutsche Industrie Normen [18], etc. The recommendations quote typical parameters relevant for the listening-room quality, show desirable ranges of those parameters values, and formulate some additional requirements. The particular parameters values being generally well known they will be not repeated here. Besides they were broadly discussed in many earlier [21, 25] and recent publications [3, 10, 12].

On the other hand, it might be argued that the notion of acoustical quality has not been, so far, defined and that it is frequently employed in discrepant meanings. However, such considerations are beyond the scope of this article.

The mentioned parameters and requirement neither exhaust all possible variations of the conceptual design of listening-rooms, nor preconize any important details influencing their acoustical quality. Besides, as design rules for listening-rooms are far from being stable, so variable trends may be observed actually [7, 9] and more so, when many aspects of acoustical quality of rooms are being revised and discussed again [13, 14, 15].

At any rate some of the objective criteria are unquestionable and thus the

following general requirements ought to be fulfilled for any high quality listening-room:

- 1) Sufficient volume of the room.
- 2) Appropriate shape and dimensions.
- 3) Optimum reverberation time characteristics.
- 4) Necessary outfitting.

Ad 1) The preferred volume is to be about 80 cu.m [18]. However, lower values, starting from 43 cu.m, are also recommended [5, 12, 19], while much higher ones are mostly required [16, 17, 21], going up to 150 cu.m.

Ad 2) Although irregular shapes are not excluded, the main concept remains to be a parallelepipedally shaped room.

Its length to height and width to height ratios should be different and far from integer values. Recommended ratios are [17, 21]: length/height < 1.9 or $2.1 < \text{length/height}$ and width/height = 1.25 to 1.45. Elsewhere, recommended dimensions are given directly [12, 19]: length = 6.7 m, width = 4.2 m, height = 2.8 m.

Ad 3) Recommended values of reverberation time versus frequency are fairly discrepant which is depicted in Fig. 1.

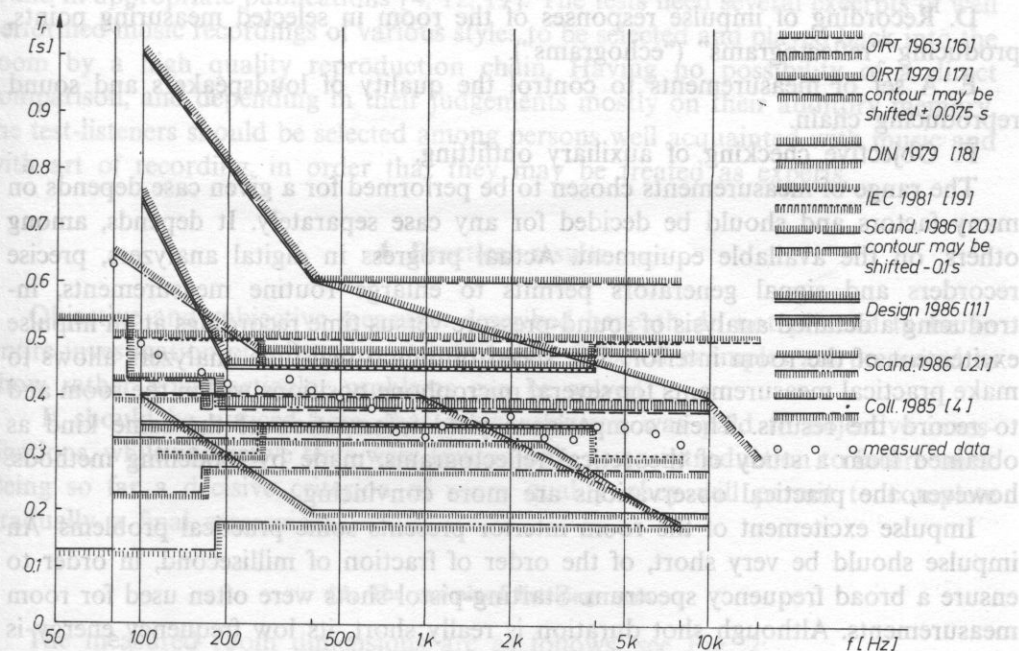


FIG. 1. Comparison of tolerances for optimum reverberation characteristics, drawn along various recommendations; the values measured in the tested room are superimposed, marked with circles.

NB: The diagram seems to be unintelligible at a first glance; however, it shows how the recommendations disagree or contradict

Ad 4) Although not required decidedly several devices are mentioned in recommendations e.g.: an opaque curtain acoustically perplex, which permits to hide the assessed equipment from the listeners view; a sound-proof control window and/or a video chain linking the listening-room with an adjacent control room; appropriate seats for a limited number of listeners; mostly carpeted floor, etc.

More detailed advantageous or disadvantageous properties of listening-rooms should be taken into account yet such considerations are applicable mainly to the existing rooms, when practical measurements and tests can be undertaken. As far as possible, objective measurements should be preferred to describe room properties, although subjective tests are, of course, unavoidable.

The following objective measurements can be easily performed, provided an appropriate measuring equipment is available:

A. Measurements of dimensions and evaluation of room surfaces and volume; specification of surface-finish materials.

B. Recording of sound decays on a middle frequency and evaluation of averaged parameters: reverberation time, early-decay-time, distinctness ("Deutlichkeitsgrad"), "Schwerpunktzeit", clarity ("Klarheitsmass") etc. (see e.g. [22]).

C. Recording of sound decays in one-third octave bands and evaluation of a frequency characteristics of reverberation.

D. Recording of impulse responses of the room in selected measuring points, producing "reflectograms" ("echograms").

E. A set of measurements to control the quality of loudspeakers and sound reproducing chain.

F. Objective checking of auxiliary outfitting.

The range of measurements chosen to be performed for a given case depends on many factors and should be decided for any case separately. It depends, among others, on the available equipment. Actual progress in digital analyzers, precise recorders and signal generators permits to enlarge routine measurements, introducing a detailed analysis of sound-pressure versus time recordings at an impulse excitement of the room interior. The speed of digital real-time analyzers allows to make practical measurements for several microphone positions within the room and to record the results. Their comparisons yield information of the same kind as obtained from a study of theoretical reflectograms, made by modelling methods, however, the practical observations are more convincing.

Impulse excitement of the room interior presents some practical problems. An impulse should be very short, of the order of fraction of millisecond, in order to ensure a broad frequency spectrum. Starting-pistol shots were often used for room measurements. Although shot duration is really short, its low frequency energy is often inadequate, depending also on pistol construction i.e. on its barrel diameter. Besides, the shot sound is highly directional and difficult to be controlled in direction and position of firing. Thus the repeatability of shot-sound impulses is poor.

Actually, impulse testing techniques use precise pulse-generators, power-amplifiers and appropriate loudspeakers to produce triggered sound impulses of

a desired shape and duration [1]. A digitally controlled excitation chain and a digital real-time analyzer permit to achieve full repeatability of acoustic measurements within the room.

Measurement results should be analyzed and compared to some selected parameter values so as to create objective test conditions, i.e. criteria, which for a satisfying quality ought to be fulfilled.

3. Subjective assessment tests

Subjective tests performed in listening-rooms are mostly aimed at quality assessment of electroacoustic equipment and of sound quality of recordings. However, similar tests may be, and sometimes should be applied to cases when the quality of a listening-room itself is to be assessed subjectively. Such assessments are less convincing as those previously mentioned, e.g. the paired comparison method, being most efficient and very often applied in subjective testing. Unfortunately, the latter method can not be used in described case.

Nevertheless, some important properties of listening-rooms can be defined by subjective tests, if carefully designed. Useful hints on preparing such tests may be found in appropriate publications [4, 12, 19]. The tests need several excerpts of well performed music recordings of various styles to be selected and played back into the room by a high quality reproduction chain. Having no possibility of a direct comparison, and depending in their judgements mostly on their auditory memory, the test-listeners should be selected among persons well acquainted with music and with art of recording, in order that they may be treated as experts.

4. Practical results

Objective and subjective measures described beneath do not pretend to be an entire investigation of a listening-room quality. Selected examples are presented to show rather how particular problems can be solved.

It should be noticed here, that main attention was paid to objective investigations, while subjective tests were treated only as an introduction to future ones. Being so far a decisive criterion of room quality, they will permit to complete gradually a final assessment.

4.1. The examined listening-room

The measured room dimensions are as follows, see Fig. 2:
length 7.80 m; width 4.12 m; height 2.77 m.

All walls are covered with special panels; some of them suspended on rails, protruding out of the wall surface and moveable, enabling to control the diffusivity, see Fig. 3. The ceiling is covered with special plaster panels.

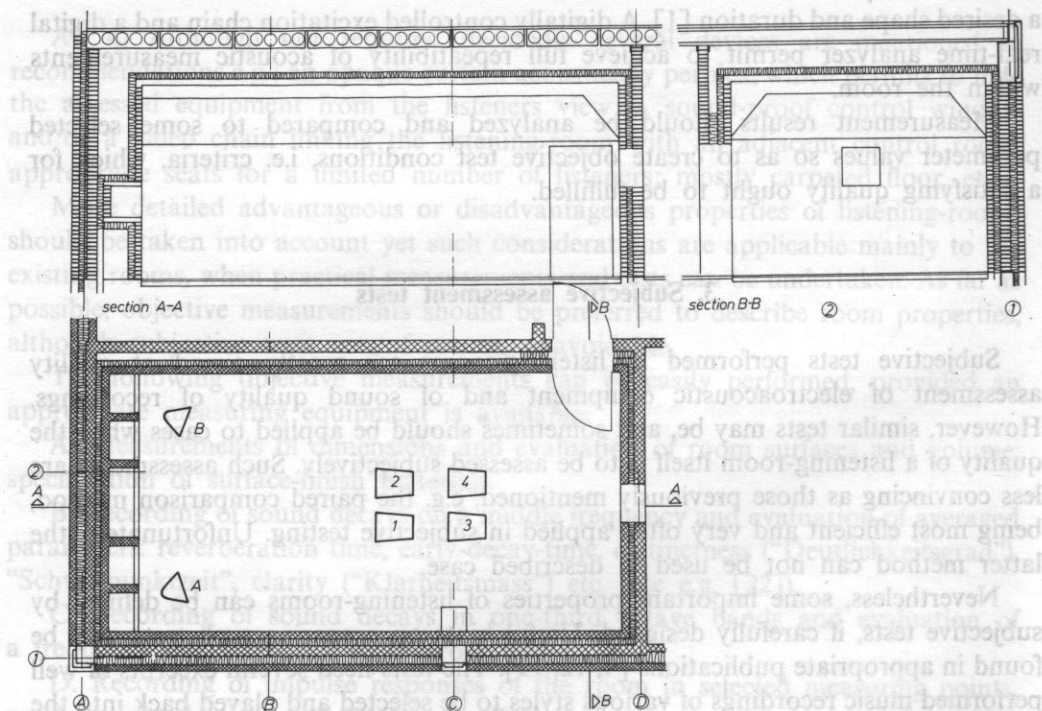


FIG. 2. Listening-room shape and dimensions. Superimposed are loudspeaker positions A and B, and seat positions No. 1, 2, 3, and 4

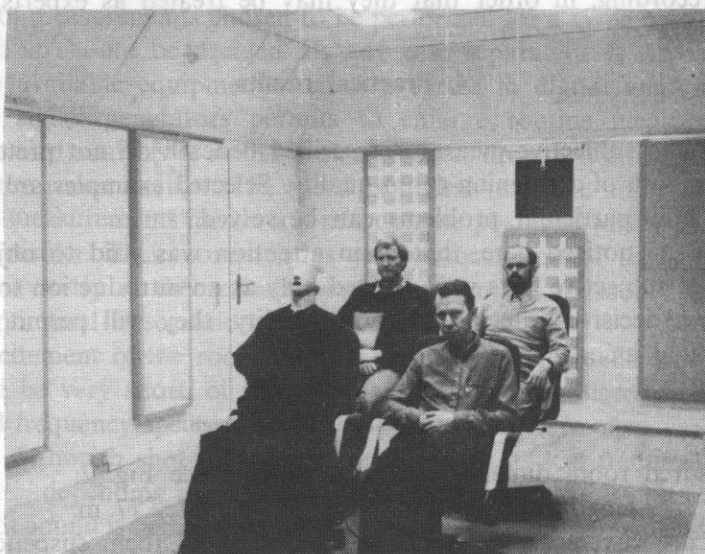


FIG. 3. Listening-room as seen from the left loudspeaker position. The seat No. 2 is occupied by a B and K artificial head- and torso-simulator in a dressing

Taking into account the angle-cut-volume between the ceiling and three walls, which has to be subtracted from the brutto volume, it makes the real volume of the room equal to 85,5 cubic metres. The relative dimension ratios are:

$$\text{length/height} = 7.80/2.77 = 2.8 > 2.1$$

$$\text{width/height} = 4.12/2.77 = 1.49 > 1.45(!).$$

The above ratios exceed the majority of recommended ones (see Section 2). However, augmenting the room volume by increasing its height was impossible due to architectural limitation. From the three-meter standard height of the room the 23 cm were to be devoted to a false ceiling construction necessary to improve sound insulation, mainly against impact noise coming from the rooms above.

It may be added here that other recommendations advise for medium size rooms, i.e. of about 80 cu.m volume, the higher ratios: the length/height = 2.5 and width/height = 1.6 [4] being closer to the measured above.

The angle-cut-volume, visible on Fig. 2 and 3, causes not only additional reflecting surfaces but, being separated from the room with elastic partition-panels, it acts as low-frequency absorber, which diminishes low-frequency reverberation time. This influence is mentioned beneath.

4.2. Objective results

The following parameter values were obtained from measurements:

Mean reverberation time $T60 = 0.47$ s;

Mean reverberation time $T30 = 0.35$ s;

Mean early-decay-time $T10 = 0.34$ s;

The frequency characteristics showing the results of reverberation measurements is depicted in Fig. 1, where it is superimposed on various contours of tolerances concerning such characteristics. The measured results can not satisfy all requirements at the same time because they are contradictory to each other. However, the measured curve fits rather well to the designed one [11], except few points in the vicinity of 1 and 3 kHz (see Sect. 5), and is in good agreement with recent recommendations [18, 20]. The presented measurements have been done with the use of B and K Precision Sound Level Meter, type 2231+1625+BZ 7104. The results, however, turned out to be strongly dependent on measurement conditions and methods, which is discussed in Sect. 5 in context of various additional measurements executed in the listening-room.

The further parameters values were processed with the use of a personal computer with appropriate software program, basing on a recorded sound impulse described above. The following parameters were evaluated:

Distinctness "Deutlichkeitsgrad" $D = 85\%$;

"Schwerpunktzeit" $t = 30$ ms;

Clarity ("Klarheitmass") $C80 = 14$ dB;

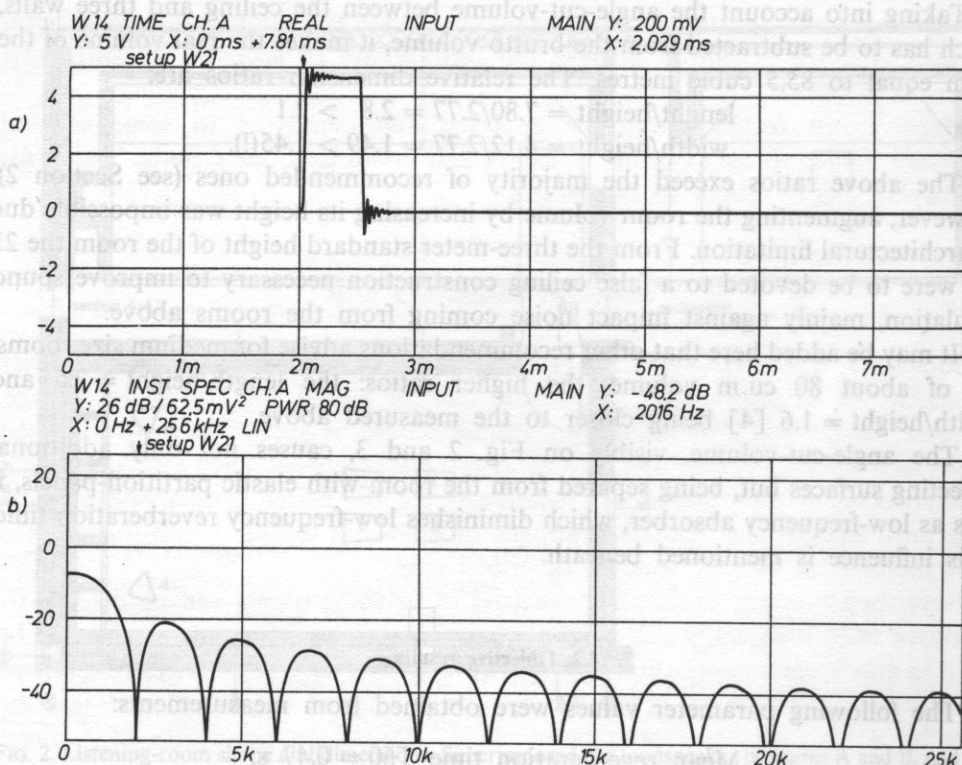


FIG. 4. An electrical excitation impulse measured at the generator output: a) time function, b) its spectrum

Furthermore, time-characteristics or reflectograms of the room were measured by means of an artificial head B and K type 4128 + 2812 (Head- and Torso-Simulator) and a two-channel digital analyzer B and K 2032, with a Hewlett Packard 7475A Plotter. The room was excited by triggered impulses produced by a digital generator Philips type PM 5193. Impulse duration was 0.6 ms, see Fig. 4. Those impulses were fed through a B and K power-amplifier to the pair of VIFA dynamic loudspeakers, type MD 10-39. A sound impulse radiated from such loudspeaker and recorded in an anechoic room is depicted in Fig. 5. The impulse shape and its spectrum show that the room was adequately excited. An example of reflectogram taken in the listening-room is shown in Fig. 6. Such reflectograms were made for four positions of the artificial head at each of the four seats within the room, visible in Fig. 2 and 3. A study of those reflectograms permits to appreciate the share of delay-specified groups of reflections on the envelope of perceived sound, depending on the listeners' seats. It allows also to observe the influence of minor changes in positioning of loudspeakers or listeners' seats, the result of an introduction of some reflecting surfaces within the listening-room etc.

FIG. 6. A reflectogram (echogram) of a sound impulse from the left loudspeaker (A), received by a B and K artificial head situated in the seat No. 1


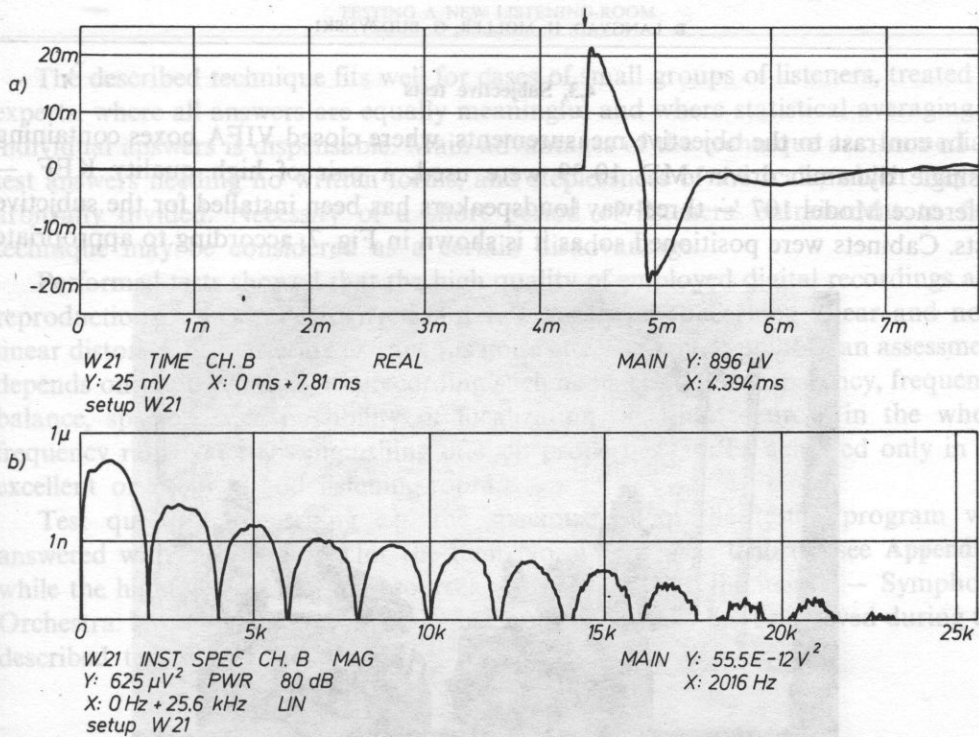


FIG. 5. A sound impulse radiated from the employed loudspeaker, measured in an anechoic-room: a) time function b) its spectrum. NB: The choice of loudspeaker type influences the degree of correspondence of the functions shown in Fig. 4 and Fig. 5, a) and b) respectively

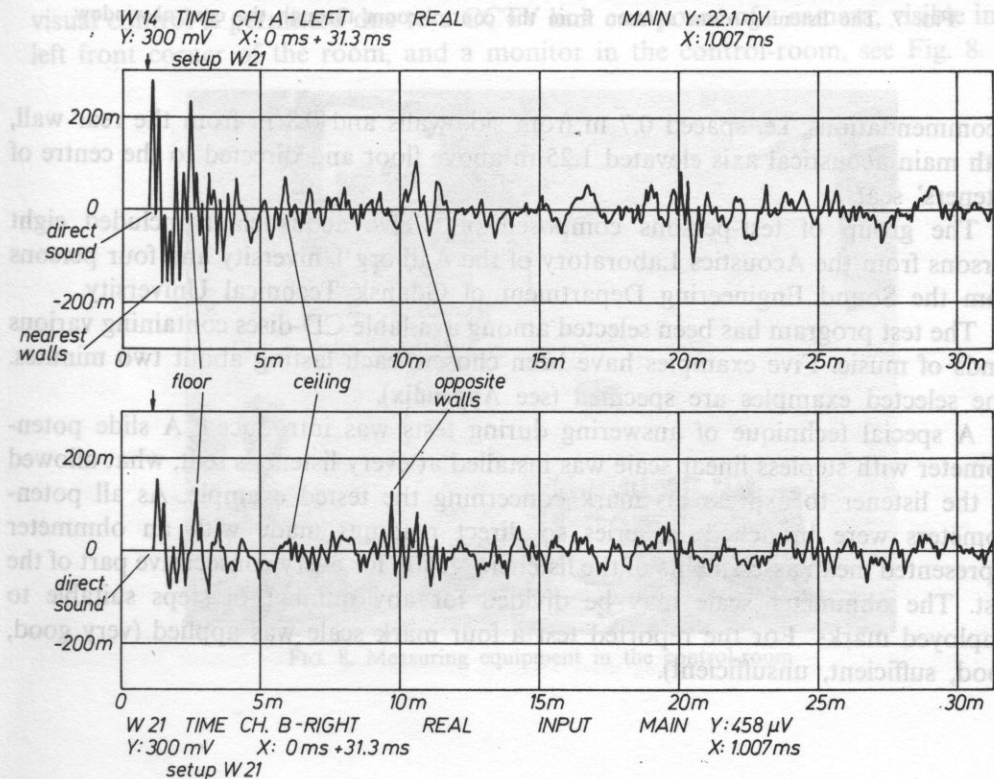

4.3. Subjective tests

In contrast to the objective measurements, where closed VIFA boxes containing a single dynamic driver MD 10-39 were used, a pair of high quality KEF — Reference Model 107 — three-way loudspeakers has been installed for the subjective tests. Cabinets were positioned so, as it is shown in Fig. 7, according to appropriate

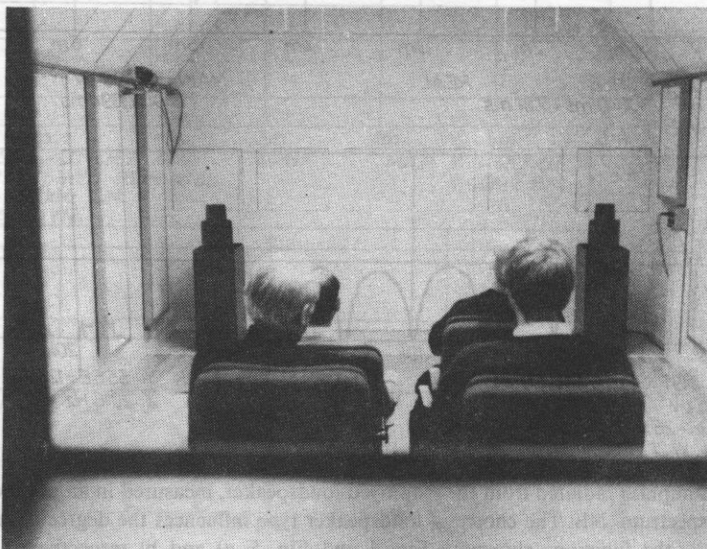


FIG. 7. The listening-room as seen from the control-room through the control-window

recommendations, i.e. spaced 0.7 m from side-walls and 0.8 m from the rear wall, with main acoustical axis elevated 1.25 m above floor and directed to the centre of listeners' seats.

The group of test-persons composed of twelve acousticians included eight persons from the Acoustics Laboratory of the Aalborg University and four persons from the Sound Engineering Department of Gdańsk Technical University.

The test program has been selected among available CD-discs containing various kinds of music. Five examples have been chosen, each lasting about two minutes. The selected examples are specified (see **Appendix**).

A special technique of answering during tests was introduced. A slide potentiometer with stepless linear scale was installed at every listener's seat, what allowed to the listener to express his mark concerning the tested example. As all potentiometers were branched in series so direct readings made with an ohmmeter represented mean assessments of the listeners' group for every consecutive part of the test. The ohmmeter scale may be divided for any number of steps suitable to employed marks. For the reported test a four mark scale was applied (very good, good, sufficient, insufficient).

The described technique fits well for cases of small groups of listeners, treated as experts, where all answers are equally meaningful and where statistical averaging of individual answers is dispensable. Main advantages of the technique are: immediate test answers needing no written forms, and steplessness of the scale, which may be arbitrarily divided. Necessity of a short period of listeners' entrainment to that technique may be considered as a certain disadvantage.

Performed tests showed that the high quality of employed digital recordings and reproduction chain rendered irrelevant test questions concerning linear and non-linear distortions, interfering extraneous noise etc. The salient point of an assessment depends on the properties of a recording such as its clarity, transparency, frequency balance, spaciousness, possibility of localization of sound sources in the whole frequency range, etc. Distinguishing of such properties can be achieved only in an excellent or a very good listening-room.

Test question concerning e.g. the spaciousness of the tested program was answered with highest mark for the item No. 3 — Opera Chorus (see **Appendix**), while the highest localization of sources was attributed to the item 1 — Symphony Orchestra. No significant faults of the listening-room have been observed during the described test sessions.

4.4 Subsidiary features

Among additional advantages of the examined room its efficient connections to neighbouring control-rooms should be emphasized. First of all, a good direct insight from the control-room is allowed due to a control-window, see Fig. 7. Other kind of visual control is permitted due to a CCTV link composed of a camera, visible in the left front corner of the room, and a monitor in the control-room, see Fig. 8. The

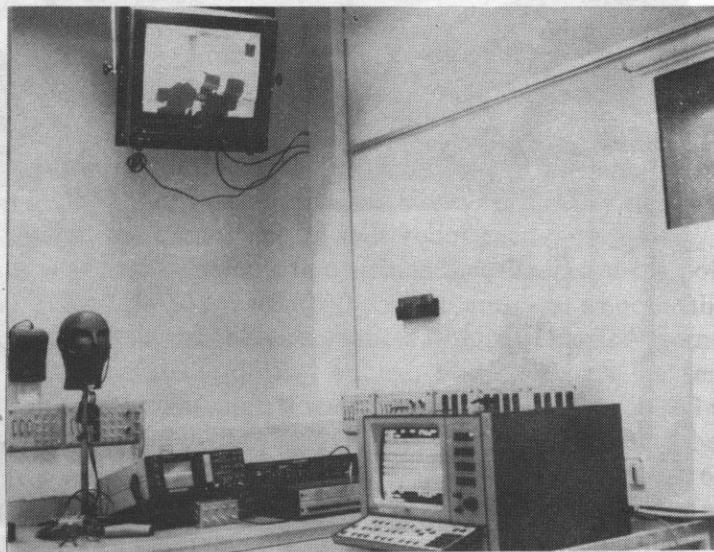


FIG. 8. Measuring equipment in the control-room

overview on the monitor, see Fig. 9, showing listeners' faces, facilitates and accelerates the execution of tests.

Additional outittings such as a curtain and carpets on floors are visible in Fig. 10.

Subjective opinions on the listening-room general quality were very high.

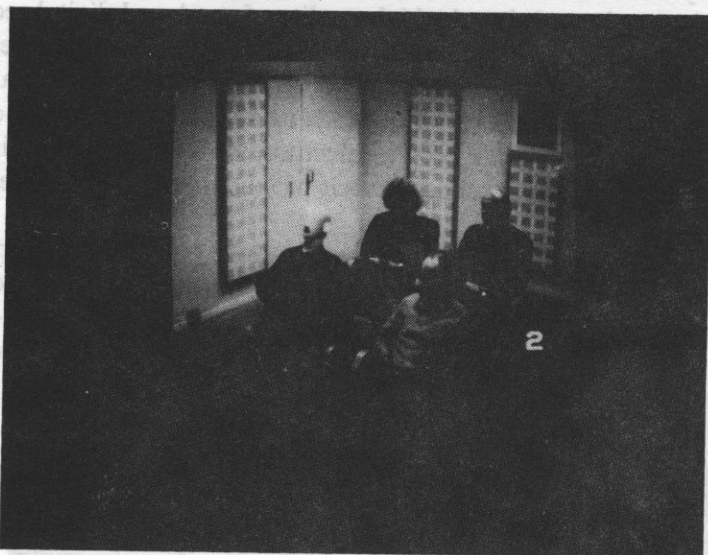


FIG. 9. The listeners observed on CCTV-monitor from the control-room

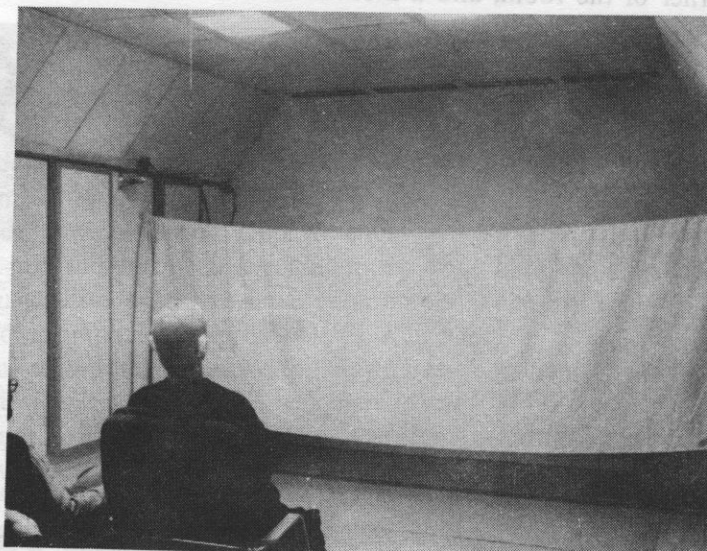


FIG. 10. Auxiliary outfitting of the listening-room: an opaque curtain, carpeted floor, markers from above showing exact listening positions, etc.

5. Discussion

As mentioned in Section 4.2, some of the objective results require further examination. First of all, the repeatability of reverberation measurements and their dependence on employed equipment and measuring method. Besides of the results shown in Fig. 1, several other measurements have been done in the listening-room at the same or slightly altered conditions. All results are presented in Fig. 11. The

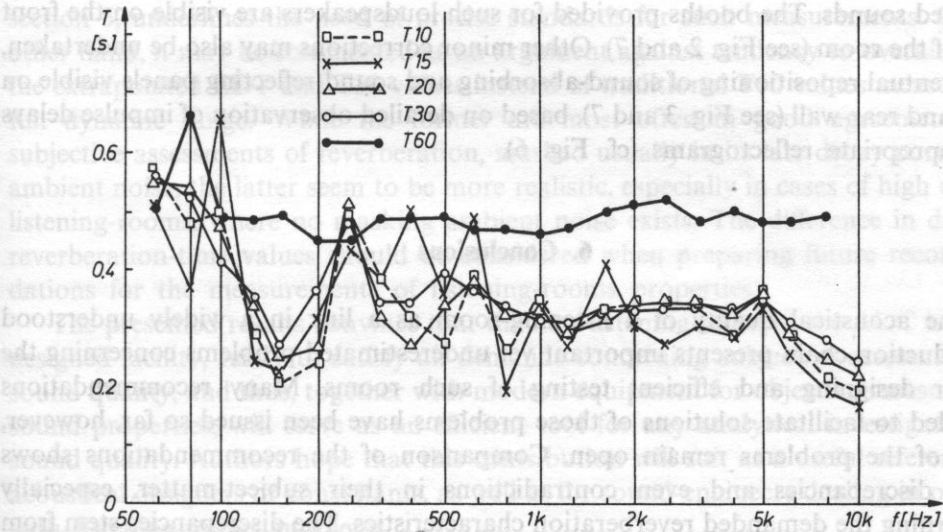


FIG. 11. Comparison of various reverberation characteristics of the listening-room

reverberation time values are processed in dependence on the analyzed portion of the sound-decays relative to 10, 15, 20 or 30 dB. An additional series of measurements has been done using a traditional evaluation of recorded decay-slopes within the 60 dB dynamic range, however, at pistol-shot room excitation.

An inspection of Fig. 11 permits to conclude that the measuring points for EDT marked T10, T15, T20 and even T30 curves are less smooth than the T60 reverberation curve. Most probably resonances within the excited room favour short lasting oscillations, which die quickly enough not to disturb the general rate of decays observed at T60 evaluation. It seems to argue for the use of T60 values rather than T30 as a characteristic parameter of the listening-room reverberation time.

For the lowest one-third octave bands of measurements i.e. 50 and 63 Hz ranges, the results are either inessential or dubious, because of stronger room resonances at lower frequencies. This observation is corroborated by subjective impressions at the listening of music tests. Some very low-pitch sound-sources, e.g. double-basses or

kettle-drums seemed unlocalizable, their resonating sound as if filling the entire room volume uniformly.

It was already noticed that some points of the measured reverberation characteristics shown in Fig. 1, especially in the vicinity of 1 and 3 kHz, did not fulfill the requirements of the design. However, in the light of above discussion such small departures of the prescribed curve seem to be unimportant. Besides, some changes in the room outfitting are foreseen, among other connected with the installation of an additional pair of flush-mounted loudspeakers, which will permit to broaden the base-width for stereophonic reproduction and reduce the amount of very early reflected sounds. The booths provided for such loudspeakers are visible on the front wall of the room (see Fig. 2 and 7). Other minor corrections may also be undertaken, e.g. eventual repositioning of sound-absorbing and sound-reflecting panels visible on side- and rear-wall (see Fig. 3 and 7), based on detailed observation of impulse delays on appropriate reflectograms (cf. Fig. 6).

6. Conclusions

The acoustical quality of a listening-room as a link in a widely understood reproduction chain presents important yet underestimated problems concerning the proper designing and efficient testing of such rooms. Many recommendations intended to facilitate solutions of those problems have been issued so far, however, most of the problems remain open. Comparison of the recommendations shows some discrepancies and even contradictions in their subject-matter, especially concerning the demanded reverberation characteristics. The discrepancies stem from different subjective preferences dependent, first of all, on style of listened music. As only in some highly specialized production-studios and in attached listening-rooms a given style of music may exclusively be recorded and listened to, so, for all other listening-rooms, a reasonable compromise between extreme demands should be accepted. The investigated listening-room of the Aalborg University Centre may serve as a good example of the fulfillment of acceptable compromise demands.

A sensitive dependence of subjective reverberation measurements on an employed measuring method and a minor changes in position of a measuring microphone, as well as of objects within the room, has been demonstrated in practice. It emphasizes the need for a precise specification of requirements to examine the acoustical properties of small rooms, in contrast to medium and large rooms, where only averaged characteristics are taken into considerations.

The properties of a listening-room referred to a specified place within the room may be precisely described due to reflectograms obtained by the use of impulse measurements aided by the technique of two-channel digital analysis. This technique experimented on the investigated example may be, and should be developed in similar future investigations. It may be especially useful for creating conditions of repeatable listening situations for assessments of stereophonic sound images.

The method of reflectograms may be generally applied to proper positioning of loudspeakers and listeners' seats, as well as reflecting or absorbing panels within a room. Such panels existing within the examined listening-room might be optimally positioned depending on concurrently measured reflectograms. Some method facilitating the time-consuming trial-and-error searching for optimal position of every panel should be invented before. Referring to the necessity of precise positioning of the listeners' seats, some method of marking their localization in the room should be applied.

The comparison of results of various reverberation measurements, discussed in section 5, underlines the need of precise standards for such measurements. On the other hand, it may be commented as an argument against tendency to overall use of the extrapolated EDT and T30 values instead of traditional T60 values measured in full dynamic range. While the former are most often in good agreement with subjective assessments of reverberation, masked usually in its late decay portion by ambient noise, the latter seem to be more realistic, especially in cases of high quality listening-rooms, where no masking ambient noise exists. The difference in defining reverberation-time values should be considered when preparing future recommendations for the measurements of listening-rooms properties.

The presented results convince that the new listening-room at the AUC is a well designed facility, ready to satisfy all demands concerning subjective assessments of sound quality, and thus, together with modern equipment for objective measuring of sound properties, will serve as an efficient tool for any analytical investigation on sound quality. Authors hope that this contribution will suit as a useful reference for acoustical designers or consultants, as well as for sound-engineers dealing in practice with listening-rooms problems.

7. Acknowledgement

This publication results from the cooperation between Aalborg University Centre and Gdańsk Technical University, enabled thanks to the Agreement of Cooperation signed by the Rectors of both Universities.

Authors gratefully appreciate participation of their colleagues of the Aalborg University Centre as well as colleagues from Gdańsk Technical University visiting Aalborg, who helped in the measurements and at preparing materials necessary for the presentation of results.

Appendix: List of recordings used as subjective test

1. G. MAHLER: *Symphony No. 7, Introduction* (executed by Frankfurt Symphony Orchestra, conduct. by E. Inbal) CD Denon Digital, No. 1553, 1986.
2. Fr. CHOPIN-MILSTEIN: *Nocturne C sharp minor* (played by Kyung Wha Chung, acc. by Ph. Moll) CD Decca, 1987.

3. C. M. v. WEBER: "Viktoria, Viktoria" (Opera Chorus) Deutsche Grammophon, Digital Recording, 1985.
4. J. BRAHMS: *Prelude from Op. 122* (played by Kurt Rapf on the Hammer Organ of the Jesus Christ Church in Berlin-Dahlem) Intercord, Digital Recording, 1985.
5. E. GARDNER: "Misty" Jazz — Verve Records, AAD.
(Every item, eventually faded out, lasted about 2 min.; the whole test was rerecorded on tape, using a noise reduction system Dolby C).

References

- [1] M. BARRON, *Impulse testing techniques for auditoria*, Applied Acoustics, **17**, 165–181 (1984).
- [2] J. BORENIUS, *On loudspeaker response in sound control rooms*, J. Audio Eng. Soc., **29**, 4, 258–261 (1981).
- [3] J. BORENIUS, S. U. KORHONEN, *New aspects on listening room design*, 77th AES Conv., Hamburg, Preprint 2184 (C-2), 1985.
- [4] M. COLLOMS, *High performance loudspeakers*, Pentech Press, London 1985.
- [5] C. L. S. GILFORD, *The acoustic design of talks studios and listening rooms*, J. Audio Eng. Soc., **27**, 1/2, 17–31 (1979).
- [6] K. HOJBERG, *Two-channel analysis in room acoustics*, 80th AES Conv., Montreux, Paper C-6, 1986.
- [7] W. LAU, K. HUHN, *Der neue Bezugsabhörraum des Rundfunks der DDR*, Bericht von der dreizehnten Tonmeistertagung, S. 216–232, München 1984.
- [8] S. P. LIPSHITZ, *Stereo microphone techniques...* J. Audio Eng. Soc., **34**, 9, 716–744 (1986).
- [9] A. MUNRO, *Developments in recording and monitoring acoustics*, Studio Sound, pp. 50–54, October, 1980.
- [10] H. MØLLER, *Listening rooms for test of loudspeakers*, in Proc. of Symp. on Perception of Reproduced Sound, pp. 125–134, Ed. S. Bech and O. J. Pedersen, Aarhus, 1987.
- [11] J. PEDERSEN, *Opførelse af akustiske maalerum ved Aalborg Universitetscenter*, Proc. of Nordic Acoustical Society, pp. 281–284, Aalborg, 1986.
- [12] F. E. TOOLE, *Planning of the listening test — Technical and environmental variables*, in Proc. of Symp. on Perception of Reproduced Sound, pp. 41–49, Ed. S. Bech and O. J. Pedersen, Aarhus, 1987.
- [13] E. J. VÖLKER, *Control rooms for music monitoring*, J. Audio Eng. Soc., **33**, 6, 452–461 (1985).
- [14] J. WRIGHTSON, *Psychoacoustic considerations in the design of studio control rooms*, J. Audio Eng. Soc., **34**, 10, 789–795 (1986).
- [15] J. WRIGHTSON, R. BERGER, *Influence of rear-wall reflection patterns in live-end-dead-end-type recording studio control rooms*, J. Audio Eng. Soc., **34**, 10, 796–802 (1986).
- [16] *Recommendation No 22 from Technical Committee OIRT "Technical Parameters of Listening Rooms"*. Moscow 1963.
- [17] *Empfehlung der technischen Kommission der OIRT Nr 86/1 "OIRT-Bezugs-Abhöräume"*, Varna 1979.
- [18] DIN 45573, Teil 4, "Lautsprecher-Prüfverfahren-Hörtest", Deutsche Normen, 1979.
- [19] IEC Report on "Listening test on loudspeakers", International Electrotechnical Commission, Publication 268-13, Geneva 1981.
- [20] *Technical recommendation from Danmarks Radio*, Norsk Rikskringkasting, Rikisutvarpid, Sveriges Radio, Yleisradio, N 12-A, *Listening Conditions in Sound Control Rooms*, Danmarks Radio, Soborg, Denmark, 1986.
- [21] *Technical recommendation from Danmarks Radio*, Norsk Rikskringkasting, Rikisutvarpid, Sveriges Radio, Yleisradio, N 12-C, *Reference listening room*, Danmarks Radio, Soborg, Denmark, 1986.
- [22] *Taschenbuch Akustik*, Ed. W. Fasold, W. Kraak, W. Schirmer, Verlag Technik, Berlin 1984.

Received on April 4, 1988.