

Online First March 9, 2026

Technical Note

Laboratory Evaluation of Underwater Acoustic Attenuation Provided by Air Bubble Curtains

Alfio YORI*, José Luis BARROS, Rodrigo TORRES, Felipe FIGUEROA

*Instituto de Acústica, Universidad Austral de Chile
Valdivia, Chile**Corresponding Author: ayori@uach.cl*Received June 3, 2025; revised December 26, 2025; accepted January 1, 2026;
available online January 16, 2026; version of record March 9, 2026.*

Air bubble curtains are widely used in Chilean salmon farming to protect fish from water pollutants. Due to new requirements from the Environmental Assessment Service, their use for underwater noise mitigation has become very important. This study aimed to evaluate the acoustic attenuation provided by a type of curtain widely used in salmon farming and seawater desalination under laboratory conditions, obtaining results independent of the conditions encountered in field work. This allowed for comparative measurements of different bubble curtain configurations. This study presents the results of an acoustic evaluation of underwater sound attenuation provided by different bubble curtain configurations, conducted in the test channel of the Engineering Department at the Universidad Austral de Chile. The parameter evaluated was the insertion loss (IL). It was found that the evaluated bubble curtains provided a broadband insertion loss between 11 dB and 12 dB in the simplest configuration and IL per third-octave band equal to or greater than 10 dB. The 10 dB attenuation in the source level represents a significant reduction in the area of acoustic impact, reducing the physiological damage distances for the marine mammal species considered by at least 78.4%.

Keywords: air-bubble curtain, underwater sound attenuation, reduction of physiological risk, underwater noise control.



Copyright © 2026 The Author(s).
This work is licensed under the Creative Commons Attribution 4.0 International CC BY 4.0
(<https://creativecommons.org/licenses/by/4.0/>).

1. Introduction

Currently, in Chile, bubble curtains are widely used in salmon farming centers to protect salmon from algae blooms or waterborne solid and liquid contaminants. Another use of these bubble curtains, which has been steadily increasing in our country, is in the water intake pipes of desalination plants to prevent the suction of organic matter. Due to new requirements of the [Environmental Assessment Service \[SEA\] \(2022\)](#), regarding the impact of underwater noise, a new need arises for the use of bubble curtains to mitigate anthropogenic underwater noise.

The efficacy of bubble curtains in regulating the dispersal of both solid and oil contaminants can be demonstrated visually. However, validating their effectiveness in sound attenuation poses a greater challenge. Despite the ambiguity surrounding the quantification of the effectiveness of bubble curtains in reducing underwater noise, they are generally recommended as a possible strategy for mitigating the acoustic impact on marine organisms. One of the reasons why information about the acoustic effectiveness of these curtains presents high variability is the lack of attenuation measurements under controlled conditions ([RUSTEMEIER *et al.*, 2012](#); [BEELLEN *et al.*, 2025](#)), contrasted with the high number of field measurements ([MOLNAR *et al.*, 2020](#); [WÜRSIG *et al.*, 2000](#); [DÄHNE *et al.*, 2017](#); [LUCKE *et al.*, 2011](#)) and computerized models studies ([NOVARINI *et al.*, 1998](#); [HALL, 1989](#); [GÖTTSCHE *et al.*, 2013](#); [QI *et al.*, 2021](#); [TSOUVALAS, 2020](#)).

Air bubble curtains can be used as underwater acoustic barriers to control underwater noise sources and reduce acoustic impacts in the marine environment. Air bubble curtains are one of the few mitigation measures available for controlling anthropogenic underwater noise (STRIETMAN *et al.*, 2018; KOSCHINSKI, LÜDEMANN, 2013; MERCK *et al.*, 2014; BELLMANN, 2014; Joint Nature Conservation Committee [JNCC], 2010; WERNER, 2010; LUCKE, SIEMENSMA, 2013). Currently, the Environmental Assessment Agency (SEA, 2022) requires that projects with potential underwater acoustic impacts include mitigation measures, with air bubble curtains being a possible solution.

Due to this lack of information or clarity about sound attenuation provided by the air-bubble curtains, the main objective of this work is to assess, under controlled laboratory conditions, the acoustic attenuation provided by a type of curtain widely used by both the salmon industry and the industries of sea-water desalinization as well; seeking to achieve results independent of those variable conditions so commonly present in field measurements. Thus, attenuation results obtained from different curtain configurations may be compared.

This work shows the results of the acoustic assessment of underwater sound attenuation given by different configurations of air-bubble curtains, which was carried out in the test-channel belonging to the Engineering Faculty from Universidad Austral de Chile. The assessed parameter was insertion loss (IL), estimated from the sound pressure level generated by a sound source over a hydrophone, with and without the presence of the evaluated attenuating element (FAHY, 2001).

2. Objectives

To measure, under controlled conditions, underwater sound attenuation provided by air-bubble curtains presently used in the control of solid and liquid particles in salmon farming and water desalination plants.

To evaluate the reduction in the acoustic impact area of a project involving underwater noise and marine mammals when air bubble curtains are used as a mitigation measure.

3. Theoretical framework

3.1. Underwater sound generalities

In air acoustics, the standard reference pressure $p_0 = 20 \mu\text{Pa}$ corresponds to the threshold of human hearing. In contrast, underwater acoustics uses a different reference pressure (ROBINSON *et al.*, 2014; MÖSER, BARROS, 2004) equal to $p_0 = 1 \mu\text{Pa}$. It is important to note that, due to significant differences in the acoustic impedance of air and water, sound pressure levels between these two media cannot be directly compared. For example, even in extremely quiet underwater environments, the broadband background noise level is generally around 90 dB re $1 \mu\text{Pa}$. Under high wind conditions, this value may reach approximately 120 dB re $1 \mu\text{Pa}$ (RICHARDSON *et al.*, 1995; URICK, 2010).

3.2. Sound and marine mammals

Anthropogenic underwater noise in the oceans can negatively affect mammals and invertebrates. In the oceans, sound propagates efficiently, just as light does in air (RICHARDSON *et al.*, 1995). Marine mammals have evolved, taking advantage of the phenomenon of low sound attenuation using their hearing for most tasks, whereas land mammals use their eyesight. Thus, marine mammals use hearing for critical tasks such as navigation, communication, prey hunting, predator detection, and spatial localization in the dark ocean (RICHARDSON *et al.*, 1995; URICK, 2010; Department of Arts, Heritage and the Gaeltacht [DAHG], 2014). Marine mammals can be mainly divided into (Department of Planning, Transportation and Infrastructure [DPTI], 2012):

- Mysticetes or baleen whales, where this group includes large whales such as right whales, sei whales, humpback whales and blue whales. These species produce sounds mainly under 1000 Hz; with notable exceptions such as the humpback whale, which emits frequencies exceeding 1000 Hz, and the blue whale, which emits frequencies as low as 10 Hz to 15 Hz.

- Odontocetes or toothed whales, in which dolphins, killer whales, sperm whales and porpoises are included. This type of cetacean communicates using frequencies under 20 kHz and use high-frequency echolocation to perceive their surroundings, using frequencies over 20 kHz.
- Pinnipeds, which include sea lions and sea elephants, communicate using frequencies ranging from 1 kHz to 4 kHz.

3.3. Physiological and behavioral impact due to underwater noise

The effects of underwater noise of anthropogenic origin over marine mammals may be divided into five categories, which depend on the distance between the receiver and the sound source (DAHG, 2014; DPTI, 2012; MCKENZIE, 2015):

- physiological stress response,
- behavioral response,
- masking,
- temporary threshold shift (TTS),
- permanent threshold shift (PTS) or physical damage.

The frequency ranges through which these five groups of animals communicate are not well defined, and the levels of sound vary significantly between species. The range over which sounds can be detected depends largely on background noise levels and the animal's hearing threshold. Figure 1 shows a comparative graph of the average hearing thresholds of different mammal groups.

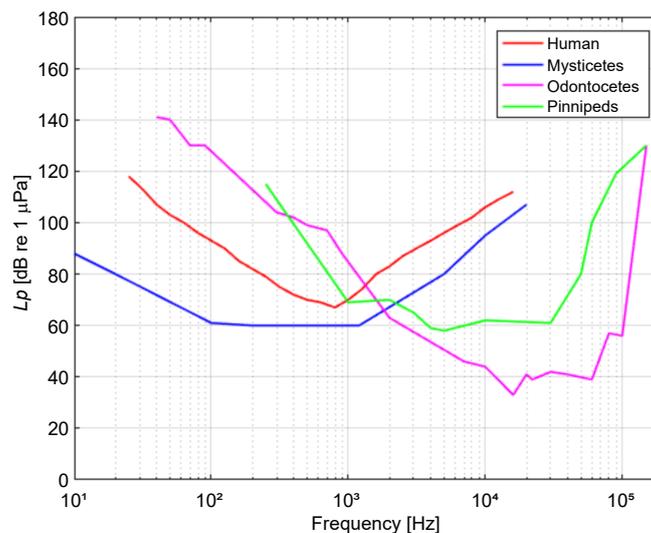


Fig. 1. Average hearing thresholds of different groups of marine mammals and humans when underwater (PARVIN, NEDWELL, 1995; NEDWELL *et al.*, 2004).

Masking is an effect whereby noise masks essential auditory signals for animals, such as communication, obstacles or predator detection.

Changes in behaviour are observed across a wide range of sound levels but are difficult to evaluate objectively, since an animal's reaction to a noise depends on factors such as the type of sound, exposure time, and the season.

A TTS indicates temporary deafness, whereas a PTS implies a irreversible hearing loss (DAHG, 2014; DPTI, 2012; MCKENZIE, 2015).

It is important to note that not all high-level sounds will be harmful for all species. The auditory perception of a sound is considered harmful only if its frequencies fall within the audible range of the species concerned. Secondly, the level must exceed the initial level at which the species begins to perceive sound, around 50 dB (RICHARDSON *et al.*, 1995; NEDWELL *et al.*, 2007).

Figure 2 shows a comparison of the frequency spectrum of pile driving noise at a distance of 25 m (YORI, 2018) with the hearing thresholds of different species (NEDWELL *et al.*, 2004). Frequency spectrum measured during the driving of piles 0.61 m in diameter, with a D62 diesel hammer and 40 blows per minute.

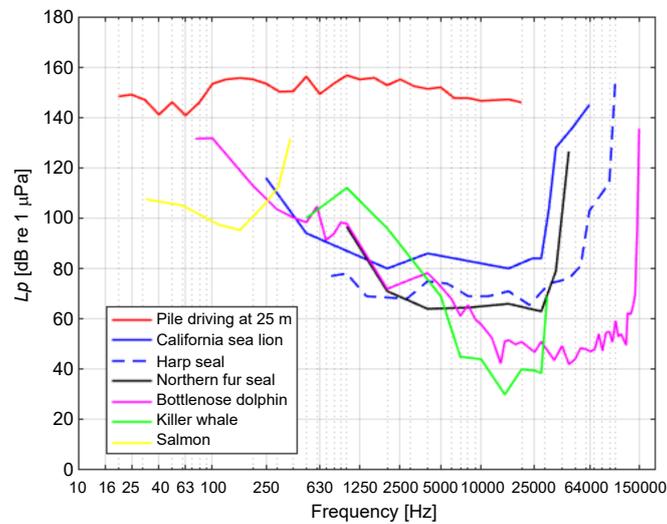


Fig. 2. Spectrum of a pile driving noise in $1/3$ -octave bands, in contrast with the audiograms of different species (YORI, 2018; NEDWELL *et al.*, 2004).

3.3.1. Criteria for the assessment of underwater noise impact NOAA NMFS 2024

The National Marine Fishing Service (NMFS) of United States, belonging to the National Office of Ocean and Atmospheric Administration (NOAA), organized, interpreted and synthesized available scientific information regarding the impact of underwater noise over marine mammals, in order to specify the maximum thresholds to avoid the occurrence of a temporal hearing shifts TTS or an auditory injury AUD INJ, where AUD INJ includes, but is not limited to PTS. Marine mammals are grouped into seven groups as shown in Table 1.

Table 1. Hearing groups and ranges according to criterion by National Marine Fisheries Service [NMFS] (2024).

Hearing group	Hearing range
Low-frequency (LF) cetaceans (baleen whales)	7 Hz to 36 kHz
High-frequency (HF) cetaceans (dolphins, toothed whales, beaked whales, bottlenose whales)	150 Hz to 160 kHz
Very high-frequency (VHF) cetaceans (true porpoises, Kogia, river dolphins, cephalorhynchid, Lagenorhynchus cruciger, L. australis)	200 Hz to 165 kHz
Phocid pinnipeds (PW) (underwater) (true seals)	40 Hz to 90 kHz
Otariid pinnipeds (OW) (underwater) (sea lions and fur seals)	60 Hz to 39 kHz
Phocid pinnipeds (PA) (air) (true seals)	42 Hz to 52 kHz
Otariid pinnipeds (OA) (air) (sea lions and fur seals)	90 Hz to 40 kHz

The noise levels used by NMFS (2024) criteria to assess the impact of underwater noise on marine mammals are summarized in Table 2. Levels presented in Table 2 are cumulative and weighted levels, therefore the frequency

Table 2. Thresholds for assessing the acoustic impact of underwater noise. Auditory injury INJ and TTS according to NMFS (2024) criterion [dB re $1 \mu\text{Pa}^2 \cdot \text{s}$].

Group	Non-impulsive noise [dB]		Impulsive noise [dB]	
	Threshold TTS	Threshold AUD INJ	Threshold TTS	Threshold AUD INJ
	$\text{SEL}_{\text{cum}24\text{h}}$	$\text{SEL}_{\text{cum}24\text{h}}$	$\text{SEL}_{\text{cum}24\text{h}}$	$\text{SEL}_{\text{cum}24\text{h}}$
LF	177	197	168	183
HF	181	201	178	193
VHF	161	181	144	159
OW	179	199	170	185
PW	175	195	168	183

spectrum amplitudes of the assessed noise must be weighted by the auditory weighting functions corresponding to each group in Table 1. These auditory weighting function curves represent the hearing characteristics of the species classified in each one of these groups.

4. Materials and methods

4.1. Measurement system

The system employed to measure of underwater acoustic attenuation, provided by the evaluated air bubble curtain, was as follows:

- loudspeaker Lubell Labs, model LL916H (frequency response: 200 Hz to 23 kHz (± 15 dB) and 500 Hz to 21 kHz (± 10 dB)),
- Amplifier Peavey, model 2600, 75 watt rms,
- sound level meter NTI, type 1, model XL2,
- hydrophone Cetacean Research technology, model C55 (frequency response: 15 Hz to 44 kHz (± 3 dB) and 8 Hz to 100 kHz (± 12 dB)),
- eight-track recorder Tascam, model DR680,
- power source Cetacean Research technology, model 736,
- white noise source.

It is important to note that the speaker used is capable of emitting sound below 200 Hz. According to the sound pressure level plot provided by the manufacturer, the speaker is capable of producing a sound pressure level of 130 dB re $1 \mu\text{Pa} \cdot \text{m}$ below 40 Hz.

4.2. Hydrodynamic testing channel and bubble curtain installation

The measurement was carried out in the hydrodynamic testing channel of the Engineering Faculty at Universidad Austral de Chile (see Fig. 3). The channel is 50 m in length, 3 m in width, and 1.7 m in depth, and is constructed from steel. In principle, the water depth is capable of providing a work range above 200 Hz, given that lower frequencies are not propagated along the channel (RICHARDSON *et al.*, 1995; URICK, 2010). However, near the source, there is propagation below this cut-off frequency, but its amplitude decays after a few wavelengths (MÖSER, BARROS, 2004).



Fig. 3. Hydrodynamic testing channel.

As demonstrated in Fig. 4 and Fig. 5, the distance between the sound source and the hydrophone is 20 m. The evaluation involved four configurations of the curtain, with each line comprising two diffusers and hoses.

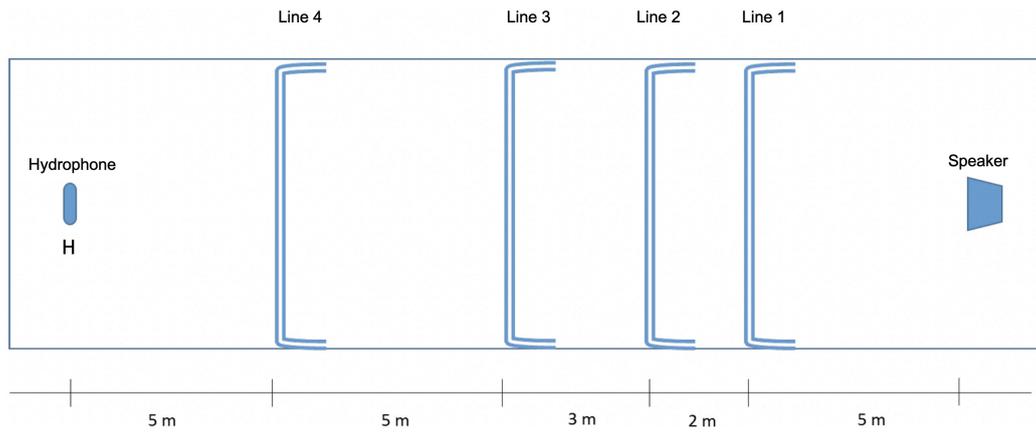


Fig. 4. Spatial arrangement of the four lines assessed in the study.

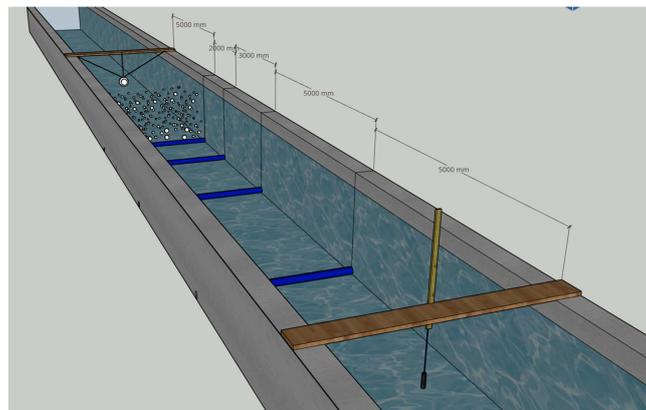


Fig. 5. Operational sequence of line 1 producing its bubble curtain.

The lines are designated line 1, line 2, line 3, and line 4, with their respective locations being 5 m, 7 m, 10 m, and 15 m from the sound source. Figure 6 shows one of these lines, where each hose has a $\frac{3}{4}$ -inch diameter and is supplied with an air flow rate of 271/min. The hoses have membranes producing microbubbles with diameters between 1 mm and 5 mm.

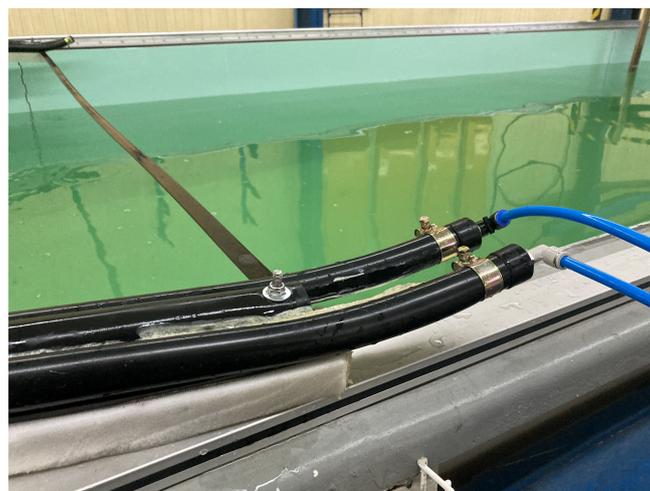


Fig. 6. Configuration of the double-diffuser line.

Each measurement was repeated four times, with the hydrophone positioned in four different locations, as illustrated in Fig. 7. The objective of these four positions was to minimize the effect of finding the hydrophones

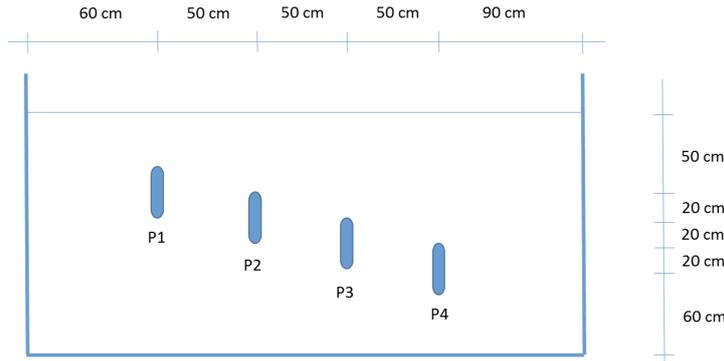


Fig. 7. Hydrophone positions.

at a position coinciding with a sound field diminishing at the point due to interference. This phenomenon was also reported in previous studies (BEELEN *et al.*, 2025), so the goal here was to improve the ratio of sound signal to background noise. To get an average value reflecting both time and space, the results from these four different positions were combined by calculating their mean energy.

4.3. Curtains configuration and measurement methodology

The formula used to measure IL is the one set by Eq. (1), which is given by:

$$IL = Lp_s - Lp_{x.x} \quad [\text{dB}], \quad (1)$$

where Lp_s is the sound pressure level generated by the loudspeaker at the position of the hydrophone and in the absence of the evaluated curtain [dB re 1 μPa], and $Lp_{x.x}$ is the sound pressure level generated by the loudspeaker at the position of the hydrophone and in the presence of the evaluated curtain [dB re 1 μPa].

The IL is defined as the logarithmic ratio of the sound power transmitted by a system before the insertion of a noise control device to the sound power transmitted after insertion. This measure takes into account not only the performance of the noise control device, but also the effects of insertion, such as the alteration of the source's sound power or the generation of sound by the attenuator itself (FAHY, 2001).

In the subindex $x.x$ in Eq. (1), the first x indicates the number of the line considered, which may be 1, 2, 3 or 4. The second x indicates the number of active diffusors per line, which may be 1 or 2. For example, $Lp_{1.1}$ corresponds to the noise level measured at the hydrophone position, when line 1 presents only one of its two bubble curtains working. $Lp_{1.2}$ refers to line 1 with its two bubble curtains operating. Figure 8a shows an example of line 1 with only one of its diffusors or hoses active, and Fig. 8b, with both of its diffusors or hoses working.

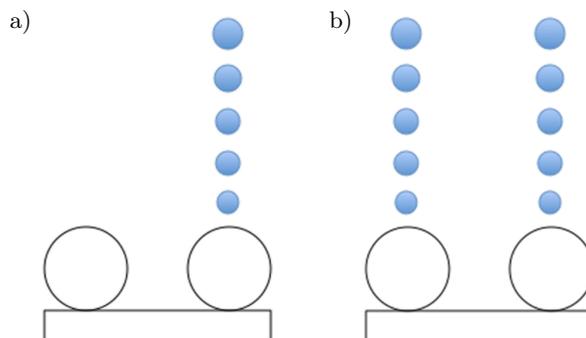


Fig. 8. a) Line 1 ($L_{1.1}$) with only one of its diffusors generating a bubble curtain, b) line 1 ($L_{1.2}$) with its two diffusors generating bubble curtains.

The measurements were carried out in a laboratory environment, under controlled conditions, allowing comparative measurements of different air bubble curtain configurations.

Table 3 shows the different configurations of bubble curtains that were assessed during this study.

Table 3. Curtains configuration and measurement methodology.

Lp_{RF}	Background noise level present in the laboratory. Loudspeaker off.
Lp_{RFB}	Background noise level with line 1, line 2 and line 3 working; each line with only one of their bubble curtains active. Loudspeaker off.
Lp_s	Level generated by the loudspeaker at the hydrophone position, without the presence of active curtains.
$Lp_{1.1}$	Level generated by the speaker at the hydrophone position, with line 1 operating with only one of its bubble curtains active.
$Lp_{1.2}$	Level generated by the speaker at the hydrophone position, with line 1 operating with both bubble curtains active.
$Lp_{3.1}$	Level generated by the speaker at the hydrophone position, with line 3 operating with one of its bubble curtains active.
$Lp_{4.1}$	Level generated by the speaker at the hydrophone position, with line 4 operating with one of its bubble curtains active.
$Lp_{1.1} + Lp_{2.1}$	Level generated by the speaker at the hydrophone position with line 1 and line 2 operating, with one of its bubble curtains active.
$Lp_{1.1} + Lp_{3.1}$	Level generated by the speaker at the hydrophone position with line 1 and line 3 operating, with one of its bubble curtains active.
$Lp_{2.1} + Lp_{3.1}$	Level generated by the speaker at the hydrophone position with line 2 and line 3 operating, with one of its bubble curtains active
$Lp_{1.1} + Lp_{2.1} + Lp_{3.1}$	Level generated by the speaker at the hydrophone position, with line 1, line 2, and line 3 operating, with one of its curtains active.
$Lp_{1.1} + Lp_{4.1}$	Level generated by the speaker at the hydrophone position with line 1 and line 4 operating, with one of its bubble curtains active.
$Lp_{1.1} + Lp_{3.1} + Lp_{4.1}$	Level generated by the speaker at the hydrophone position, with line 1, line 3, and line 4 operating, with one of its curtains active.
$Lp_{1.1}, 25\%$	Level generated by the speaker at the hydrophone position, with line 1 operating with the diffuser 1 at 25 % of maximum airflow and the diffuser 2 at 0 % of its maximum airflow.
$Lp_{1.1}, 50\%$	Level generated by the speaker at the hydrophone position, with line 1 operating with the diffuser 1 at 50 % of maximum airflow and the diffuser 2 at 0 % of its maximum airflow.
$Lp_{1.1}, 75\%$	Level generated by the speaker at the hydrophone position, with line 1 operating with the diffuser 1 at 75 % of maximum airflow and the diffuser 2 at 0 % of its maximum airflow.
$Lp_{1.1}, 100\%$	Level generated by the speaker at the hydrophone position, with line 1 operating with the diffuser 1 at 100 % of maximum airflow and the diffuser 2 at 0 % of its maximum airflow.

5. Results

5.1. Measured sound pressure levels

5.1.1. Background noise levels Lp_{BN} and Lp_{BNB}

Table 4 shows the sound pressure level Lp_{BN} recorded at the hydrophone location when the sound source is off and all bubble curtains are disconnected. It also provides the sound pressure level Lp_{BNB} , recorded under the same conditions except for all bubble curtains active. This allows for an evaluation of the noise produced by the bubble curtains themselves.

Table 4. Background noise levels measured at the four positions of the hydrophones with the loudspeaker off.

	Hydrophone position				Measured level [dB re 1 μ Pa]
	P1	P2	P3	P4	
Lp_{BN}	117.9	117.6	118.3	118.0	118.0
Lp_{BNB}	119.8	119.9	120.4	120.2	120.1

5.1.2. Loudspeaker level Lp_s without active curtains

Table 5 shows the sound pressure level measured at the hydrophone position with the sound source operating and all bubble curtains deactivated.

Table 5. Sound pressure level measured at the hydrophone position with the loudspeaker driven by white noise and all bubble curtains disconnected.

	Hydrophone position				Measured level [dB re 1 μ Pa]
	P1	P2	P3	P4	
Lp_s	160.8	161.1	163.3	161.2	161.7
Lp_s	160.9	161.6	163.5	161.4	161.9
Average value					161.8

Figure 9 shows the frequency spectrum of the laboratory background noise, measured at the hydrophone position with no noise source present (Lp_{BN}). Similarly, it displays the frequency spectrum of the background noise with all bubble curtains active (Lp_{BNB}) and the frequency spectrum of the sound measured at the hydrophone position with the sound source driven by white noise, with no active curtain (Lp_s).

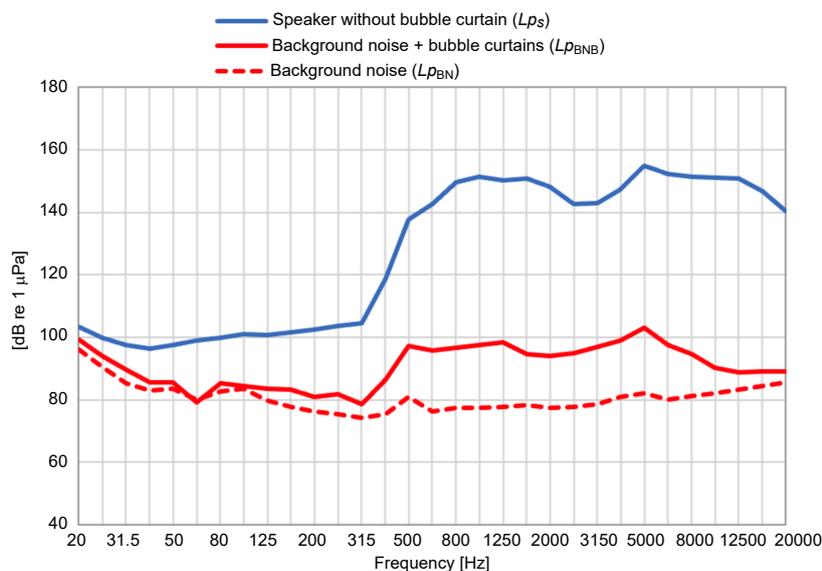


Fig. 9. Third-octave band frequency spectra of the sound source and background noise of the laboratory and air generation system.

Although the speaker specifications state that its frequency response ranges from 200 Hz to 23 kHz, Fig. 9 shows that below 200 Hz the speaker does emit sound and is capable of producing a sound pressure level at the hydrophone position higher than the background noise level. From 40 Hz upwards, the sound pressure level produced by the sound source at the hydrophone position is always higher than the background noise level, by 13 dB or more.

5.1.3. Levels measured for different curtain configurations

Table 6 shows the sound pressure levels at the hydrophone position during the different settings of the evaluated curtains, as shown in Table 3. We see that the sound pressure levels obtained by using the two bubble curtains or diffusers of line 1 ($Lp_{1,2}$) are very similar to the levels obtained by using only one of the bubble curtains of line 1 ($Lp_{1,1}$). This means that the line provides almost the same broadband attenuation in both cases. The data shows that reducing the air flow, from initially at a rate of 271/min, by half has virtually no effect on the achieved sound attenuation. Therefore, in all subsequent measurements, it was determined that only one of the two bubble curtains per line should be used.

Table 7 shows the levels obtained by modifying the percentage of the air flow of 271/min, applied to hose 1 of line 1. Figure 10 to Fig. 15 present frequency band attenuation for each bubble curtain configuration listed in Table 6.

Table 6. Sound pressure level measured at the hydrophone position with the loudspeaker driven by white noise and with different curtain configurations.

	Hydrophone position				Measured level [dB re 1 μ Pa]
	P1	P2	P3	P4	
$Lp_{1.1}$	150.6	150.3	150.4	150.2	150.4
$Lp_{1.2}$	150.2	150.0	150.4	149.9	150.1
$Lp_{3.1}$	151.2	151.0	150.9	150.8	150.9
$Lp_{4.1}$	151.2	150.9	151.0	150.2	150.8
$Lp_{1.1} + Lp_{2.1}$	149.4	149.4	149.6	149.7	149.5
$Lp_{1.1} + Lp_{3.1}$	147.8	147.8	147.7	148.1	147.9
$Lp_{2.1} + Lp_{3.1}$	149.7	149.2	1479.2	149.5	149.4
$Lp_{1.1} + Lp_{2.1} + Lp_{3.1}$	147.8	147.7	147.7	147.6	147.7
$Lp_{1.1} + Lp_{4.1}$	146.2	146.3	146.42	146.4	146.3
$Lp_{1.1} + Lp_{3.1} + Lp_{4.1}$	145.6	145.3	145.8	145.5	145.6

Table 7. Sound pressure level measured at the position P4 of the hydrophone, with the loudspeaker driven by white noise and modifying the air flow of diffuser 1 of line 1.

Hydrophone position P4			
$Lp_{1.1}$ 25 % [dB re 1 μ Pa]	$Lp_{1.1}$ 50 % [dB re 1 μ Pa]	$Lp_{1.1}$ 75 % [dB re 1 μ Pa]	$Lp_{1.1}$ 100 % [dB re 1 μ Pa]
155.4	152.6	152.0	150.8

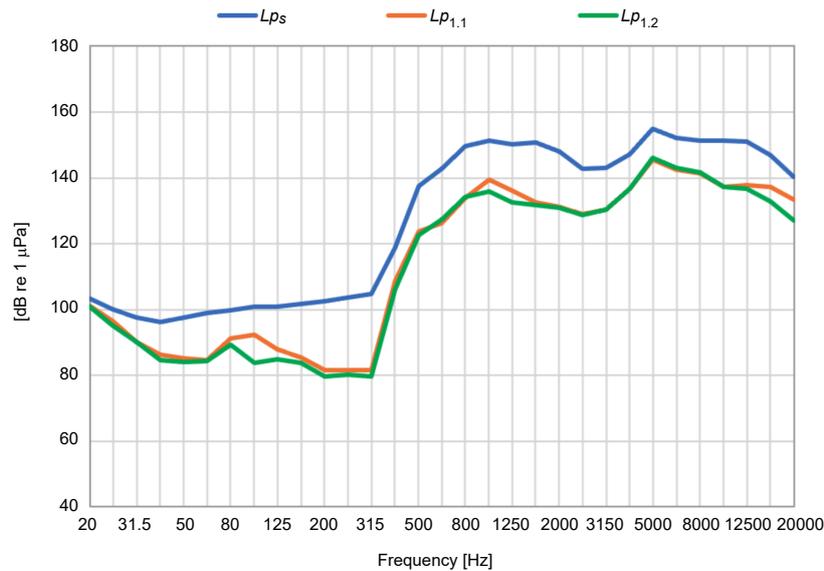


Fig. 10. Third-octave band frequency spectra obtained for curtain configurations Lp_s , $Lp_{1.1}$, and $Lp_{1.2}$ (see Table 3).

5.2. Insertion loss

The IL is estimated as the difference between the sound pressure level (Lp_s) measured without a curtain and the sound pressure level ($Lp_{x.x}$) measured when the curtain is active (Eq. (1)). Table 8 shows the broadband IL values obtained for the different combinations of bubble curtains. The results demonstrate that using a single line does not affect the broadband IL, regardless of the number of curtains per line ($Lp_{1.1}$ or $Lp_{1.2}$) or the distance of the line from the source or receiver. The various configurations of a single curtain result in an IL ranging from 11 dB to 12 dB. These attenuation values are consistent with some of the results obtained in field measurements (NEHLS *et al.*, 2015). When using two lines, the greater separation between the lines results in the greater broadband IL, with IL values increasing by up to 15.5 dB. The use of three lines causes only a slight further increase in ILs compared to two lines, reaching a level of 16.2 dB.

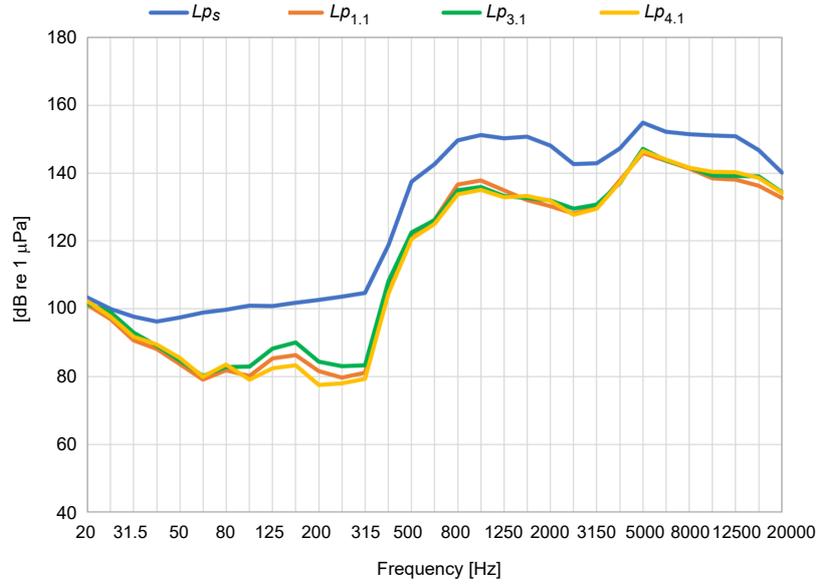


Fig. 11. Third-octave band frequency spectra obtained for curtain configurations Lp_s , $Lp_{1,1}$, $Lp_{3,1}$, and $Lp_{4,1}$ (see Table 3).

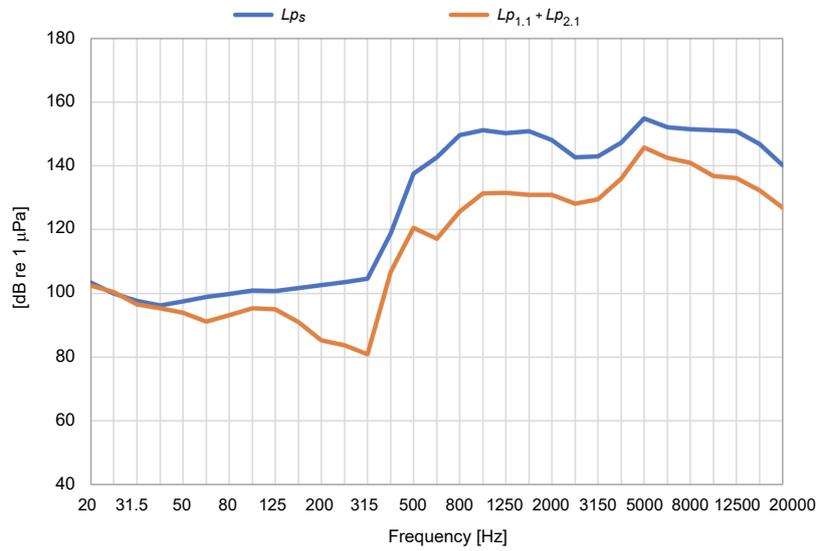


Fig. 12. Third-octave band frequency spectra obtained for curtain configurations Lp_s and $(Lp_{1,1} + Lp_{2,1})$.

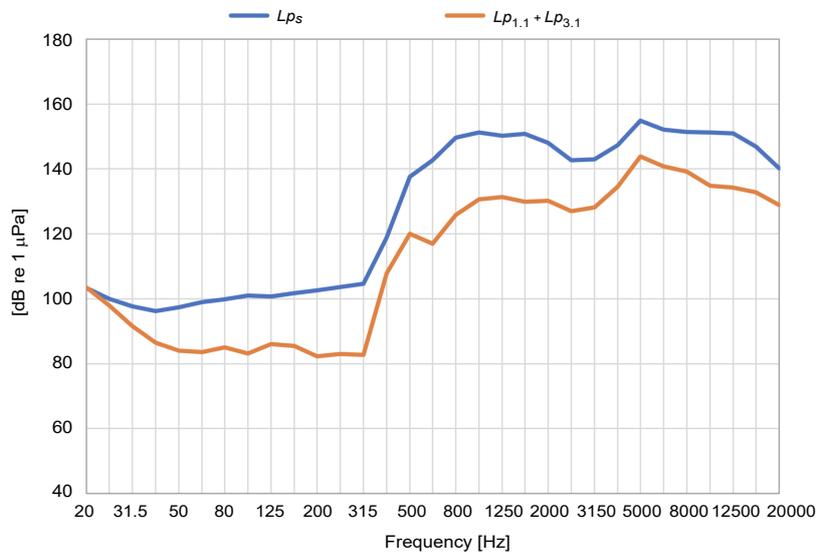


Fig. 13. Third-octave band frequency spectra obtained for curtain configurations Lp_s and $(Lp_{1,1} + Lp_{3,1})$.

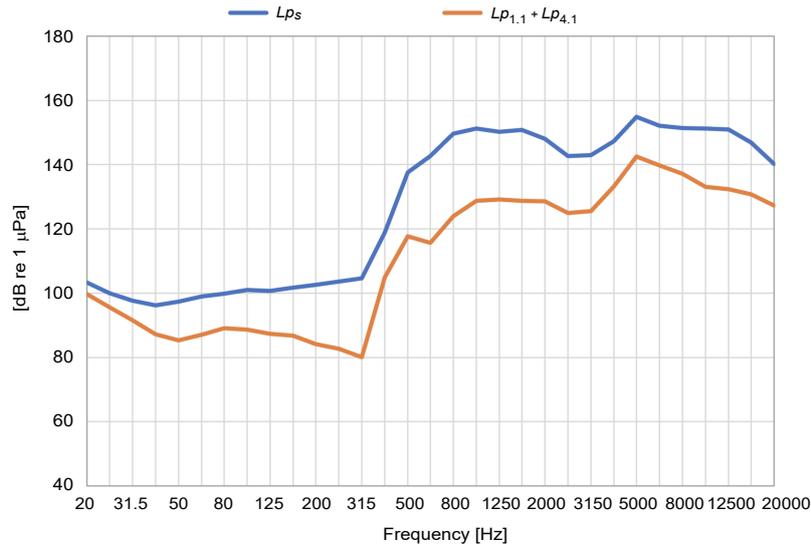


Fig. 14. Third-octave band frequency spectra obtained for curtain configurations Lp_s and $(Lp_{1.1} + Lp_{4.1})$.

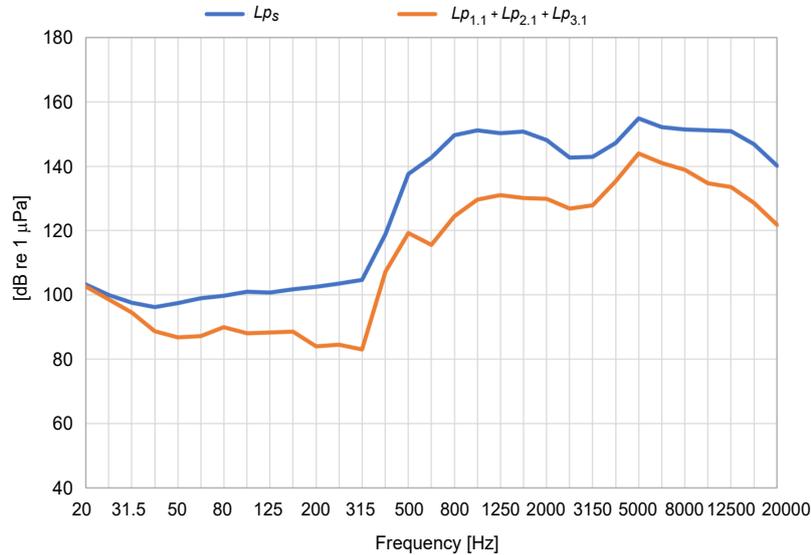


Fig. 15. Third-octave band frequency spectra obtained for curtain configurations Lp_s and $(Lp_{1.1} + Lp_{2.1} + Lp_{3.1})$.

It is imperative to establish the IL for each frequency band. As illustrated in Fig. 16, the IL per the third-octave band for line 1 is presented, considering both configurations: one active curtain $Lp_{1.1}$ and two active curtains $Lp_{1.2}$. As previously indicated in Table 6 and Table 8, the IL per frequency band provided by line 1 in both configurations

Table 8. Broadband IL for the different configurations of bubble curtains evaluated [dB re 1 μ Pa].

Curtain configuration evaluated	Lp_s [dB]	$Lp_{x,x}$ [dB]	Broadband IL [dB]
$Lp_{1.1}$	161.8	150.4	11.4
$Lp_{1.2}$	161.8	150.1	11.7
$Lp_{3.1}$	161.8	150.9	10.9
$Lp_{4.1}$	161.8	150.8	11.0
$Lp_{1.1} + Lp_{2.1}$	161.8	149.5	12.3
$Lp_{1.1} + Lp_{3.1}$	161.8	147.9	13.9
$Lp_{1.1} + Lp_{4.1}$	161.8	146.3	15.5
$Lp_{1.1} + Lp_{2.1} + Lp_{3.1}$	161.8	147.7	14.1
$Lp_{1.1} + Lp_{3.1} + Lp_{4.1}$	161.8	145.6	16.2

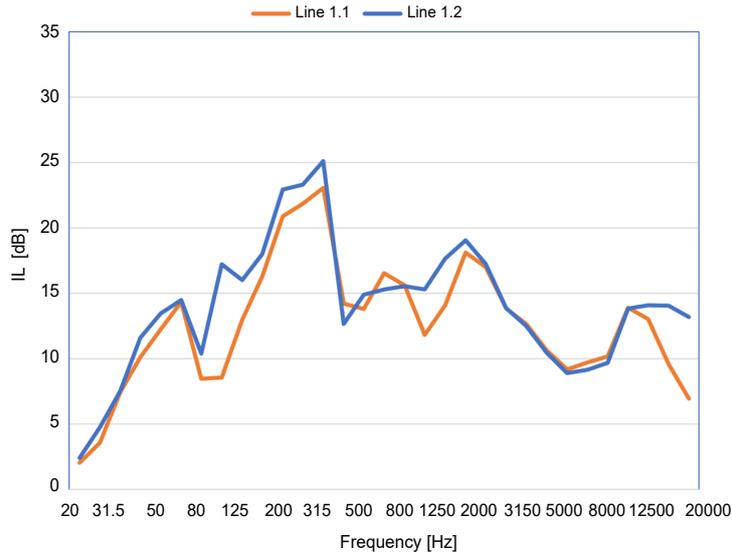


Fig. 16. IL by frequency bands given by line 1, configurations $Lp_{1.1}$ and $Lp_{1.2}$.

is practically the same. The $Lp_{1.2}$ configuration is the most prevalent in salmon farming, where its attenuation is equal to or greater than 10 dB in virtually all frequency bands from 40 Hz upwards. This minimum attenuation is consistent with that reported in another study for similar curtains (RUSTEMEIER *et al.*, 2012).

Figure 17 shows that, for the case of a single line, the position of the line between the source and the receiver will produce a change in the IL per frequency band. The closer the curtain is to the receiver, the greater the attenuation at low frequencies. This can be explained as an increase in the attenuation of low-frequency components mechanically transmitted through the bottom of the test channel.

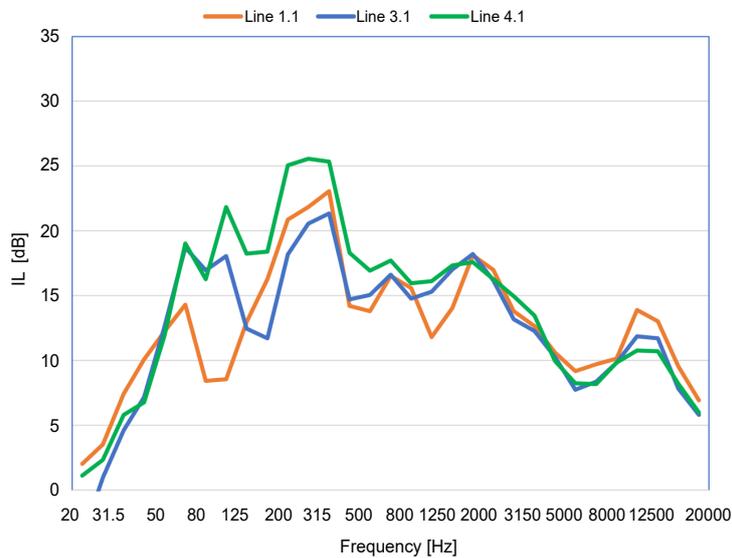


Fig. 17. IL by frequency bands given by line 1, configurations $Lp_{1.1}$, $Lp_{3.1}$, and $Lp_{4.1}$.

The employment of dual lines as opposed to a single line results in an increase in the IL per frequency band, with an increase from 400 Hz. The attenuation is directly proportional to the separation of the lines. As illustrated in Fig. 18, utilising two lines instead of a single line results in a substantial enhancement of the IL, with the maximum occurring within the frequency range from 400 Hz to 2 kHz. This leads to IL values ranging from 15 dB to 27 dB. This frequency range corresponds with another study of bubble curtains (BEELLEN *et al.*, 2025). However, there, the IL values are considerably lower due to the limitations imposed by the low signal-to-noise ratio (SNR) employed.

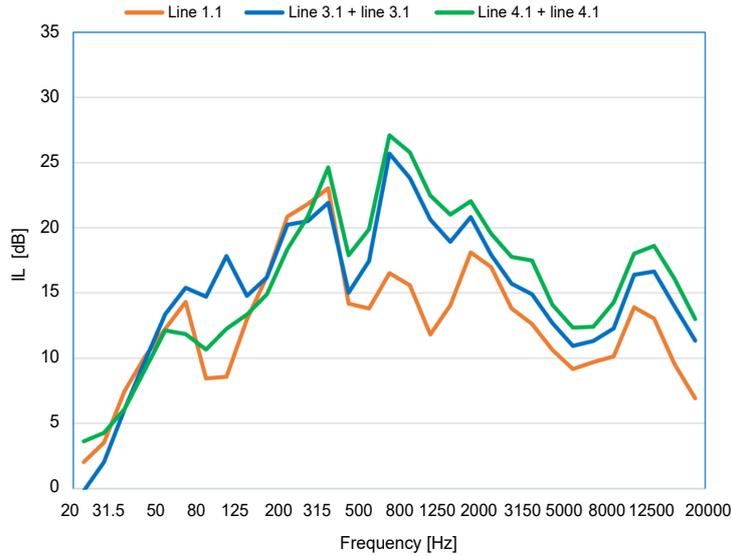


Fig. 18. IL by frequency bands given by line 1, configurations $(Lp_{1.1} + Lp_{3.1})$ and $(Lp_{1.1} + Lp_{4.1})$.

5.3. Air-bubble curtains and acoustic impact reduction

These days, bubble curtains are extensively employed as an underwater noise mitigation system; however, the extent to which the noise level of the sound source will be mitigated remains uncertain. The results of this study demonstrate that the evaluated bubble curtain will provide the IL attenuation greater than or equal to 10 dB in all frequency bands and all configurations. To comprehend the implications of a 10 dB reduction of a noise level, one must consider the acoustic impact area that would result from, for instance, pile driving operations, with and without the use of bubble curtains, as evaluated in this study. In order to assess the potential impact of the project, e.g., on marine species, it is first necessary to estimate the sound pressure level to which the species under study will be exposed. Equation (2) provides the noise level for each frequency band that a noise source generates at a given distance, considering the sound propagation model characteristic of the site:

$$Lr = SL - N \log(r) - \alpha \cdot r \quad [\text{dB}], \quad (2)$$

where Lr is the sound level per frequency band at a distance r [dB re 1 μPa], SL is the source level per frequency band (L_{eq} , $L_{p_{rms}}$, SEL) [dB re 1 $\mu\text{Pa} \cdot \text{m}$ or dB re 1 $\mu\text{Pa}^2 \cdot \text{s} \cdot \text{m}$], N is the local attenuation ratio, r is the distance from the source to the receiver [m], α is the sound absorption per frequency band [dB/m].

In deep waters and in absence of sound channels, a spherical propagation is considered with $N = 20$. In presence of sound channels, a cylindrical propagation is considered with $N = 10$.

In shallow waters, sound propagation involves a large number of reflections of the acoustic signal at the surface and seabed, making it difficult to determine the N value that correctly describes the propagation (JASTRZEBSKI, 2007; KHALILABADI, 2022; LIPPERT *et al.*, 2018). In the case of shallow waters, field measurements of attenuation at various distances from a noise source are typically conducted to obtain an empirical approximation of N , where values ranging from 13 to 35 are typically observed (RICHARDSON *et al.*, 1995). As demonstrated in the relevant literature, $N = 15$ has been shown to provide a high degree of fit with a significant number of measurements in shallow waters (MMO, 2015; NMFS, 2021; MOLNAR *et al.*, 2020). Because of this, to describe sound propagation in our example a value $N = 15$ will be used.

Once the value of N has been selected or determined, the level Lr at different distances r from a source of known level SL can be predicted. Furthermore, the maximum distance at which the emitted sound can be perceived without generating negative effects in the receiver can be determined. To evaluate the physiological impact on the considered marine species, the sound levels per frequency band Lr obtained from Eq. (2), or the source levels SL of the spectrum, must be weighted by the auditory weighting functions of each animal.

Subsequently, a comparison of the results with the highest permitted thresholds according to the applied criterion is required. These thresholds are indicated in Table 2, corresponding to specific species of marine mammals.

Pile driving is a significant source of underwater noise, generating high levels of sound pressure. In the context of construction, this noise source is typically the primary focus of attention in the initial phase of a project, as it is often the most distinct. Pile driving can easily reach broadband levels close to 200 dB re 1 μPa at a distance of 1 m. Table 9 presents the levels emitted at a distance of 10 m during the driving of a steel pile with a diameter of 1.52 m. It should be noted that each strike lasted approximately 0.1 s on average.

Table 9. Sound pressure levels generated during the driving of 1.52 m diameter piles, measured at a distance of 10 m and with a strike duration of 0.1 s (URS, 2011; RODKIN, POMMERENCK, 2014).

Source	Lp_{peak} [dB re 1 μPa]	Lp_{rms} [dB re 1 μPa]	SEL [dB re 1 $\mu\text{Pa}^2 \cdot \text{s}$]
Pile \varnothing 1.52 m	210	195	185

By normalizing these values to a distance of 1 m from the source, the SL can be obtained for the various noise descriptors, as demonstrated in Table 10.

Table 10. Estimated sound pressure levels at a distance of 1 m when driving a pile with a diameter of 1.52 m. Calculated considering a sound propagation between spherical and cylindrical $15 \log(r)$ (MOLNAR et al., 2020).

Source	Lp_{peak} [dB re 1 μPa]	Lp_{rms} [dB re 1 $\mu\text{Pa} \cdot \text{m}$]	SEL [dB re 1 $\mu\text{Pa}^2 \cdot \text{s} \cdot \text{m}$]
Pile \varnothing 1.52 m	225	210	200

For instance, consider a pile driving rate of three piles per day, with an estimated 270 blows required for each pile. This results in a total of 810 blows, and the unweighted cumulative noise exposure level over a 24-hour period is $\text{SEL}_{\text{cum}24\text{h}} = 229.1$ dB.

Figure 19 presents the third-band used for our noise source, based on data from 1.6 m diameter pile driving (NEHLS et al., 2007). The amplitude was adjusted so its broadband level matches the cumulative sound exposure level in our example.

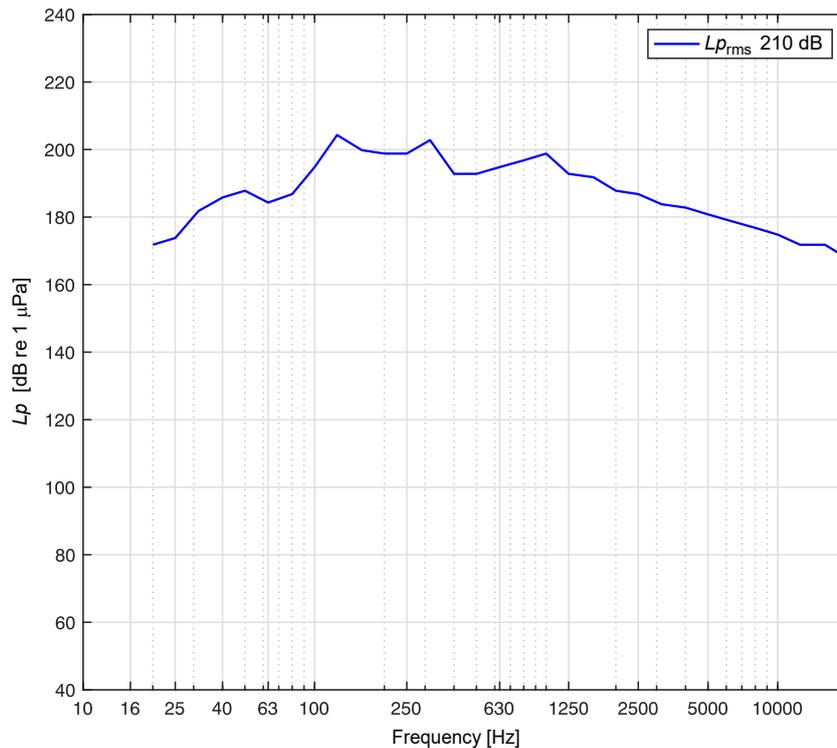


Fig. 19. Third-octave band frequency spectrum obtained for driving 1.6 m diameter piles (NEHLS et al., 2007).

Table 11 summarizes the distances at which the TTS and AUD INJ thresholds are reached for five groups of marine mammals due to pile driving of 1.52 m, according to the NMFS (2024) criteria with auditory weighting for the five animal groups. Figure 20 and Fig. 21 show the distance dependence of the weighted SEL for LF and HF mammals, respectively, and the threshold distances assuming an attenuation ratio of $15 \log(r)$.

Table 11. Evaluation of physiological effects as a result of driving 1.52 m diameter piles without the use of air bubble curtains. Auditory injury INJ and temporal threshold shift TTS according to NMFS (2024) criterion. Estimated considering sound propagation as $15 \log(r)$ (MOLNAR *et al.*, 2020), [dB re $1 \mu\text{Pa}^2 \cdot \text{s}$].

Group	SEL _{cum24h} weighted [dB]	Threshold TTS [dB]	Distance TTS [m]	Threshold AUD INJ [dB]	Distance AUD INJ [m]
LF	227.2	168	5490	183	821
HF	214.7	178	273	193	28
VHF	201.3	144	3497	159	588
OW	212.4	170	630	185	67
PW	219.6	168	2231	183	268

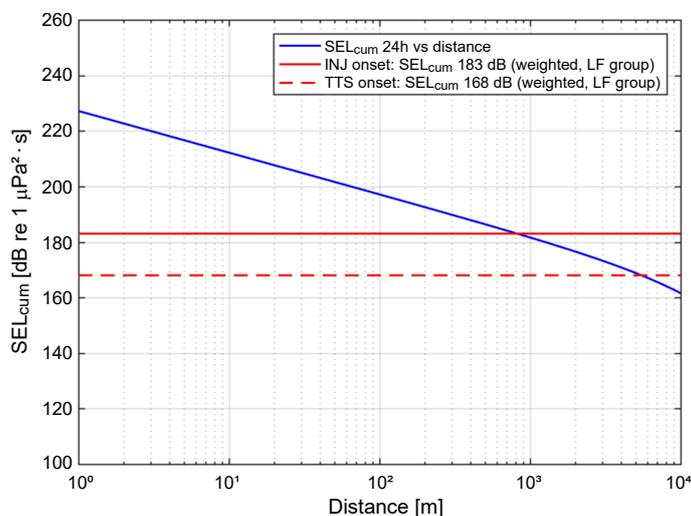


Fig. 20. Physiological impact ranges of sound emissions during pile driving on low-frequency (LF) marine mammals. Attenuation factor $15 \log(r)$.

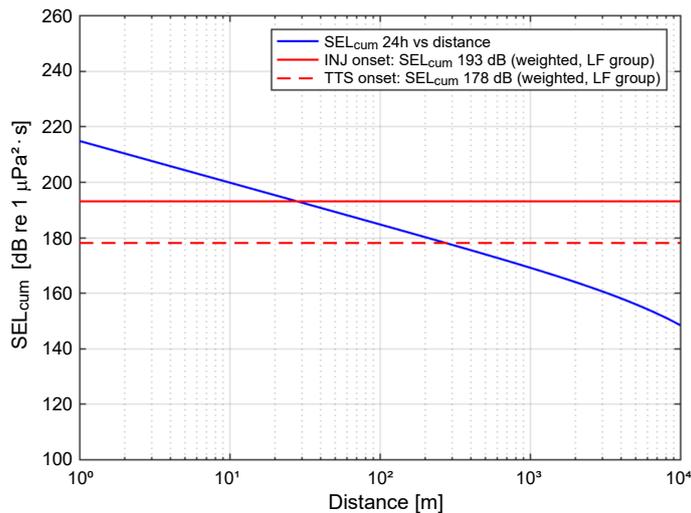


Fig. 21. Physiological impact ranges of sound emissions during pile driving on high-frequency (HF) marine mammals. Attenuation factor $15 \log(r)$.

Using a bubble curtain as tested here can reduce pile driving noise by at least 10 dB per frequency band, even in its basic form $Lp_{1,2}$. Using a conservative criterion, the spectrum levels in Fig. 19 can be reduced by 10 dB,

thus reducing the SEL_{cum24h} level from 229.1 dB to 219.1 dB. Table 12 and Fig. 22 illustrate how such attenuation decreases distances of occurrence of exceeding TTS and AUD INJ thresholds for high-frequency cetaceans.

Table 12. Assessment of physiological effects on the species considered as a result of driving 1.52 m diameter piles and using air bubble curtains as a mitigation measure. Estimated considering a sound propagation between spherical and cylindrical $15 \log(r)$ (MOLNAR et al., 2020), [dB re $1 \mu Pa^2 \cdot s$].

Group	SEL_{cum24h} weighted [dB]	Threshold TTS [dB]	Distance TTS [m]	Threshold AUD INJ [dB]	Distance AUD INJ [m]
LF	217.2	168	1183	183	177
HF	204.7	178	59	193	6
VHF	191.3	144	753	159	126
OW	202.4	170	136	185	14
PW	209.6	168	481	183	58

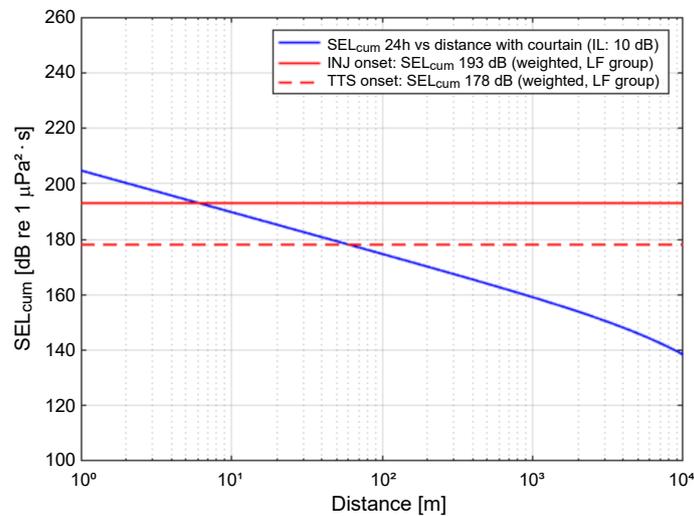


Fig. 22. Evaluation of the physiological effects on high frequency cetaceans HF due to pile driving and the use of an air bubble curtain (IL: 10 dB).

By comparing Table 11 and Table 12, it is clear that with a conservative approach, employing an air bubble curtain that provides at least 10 dB of attenuation in each frequency band leads to at least a 78.4 % reduction in the distances at which the TTS and AUD INJ thresholds are reached. This equates to a substantial decrease in the effects of pile driving on the region’s native marine fauna.

6. Discussion

The measurements were conducted under favorable background noise conditions, yielding a SNR of at least 13 dB for frequencies above 40 Hz. The background noise level reached 120.1 dB with the bubble generation system active and 118 dB with the system inactive, both referenced to $1 \mu Pa$. Sound levels produced by the loudspeaker were measured at four distinct hydrophone positions to reduce potential wave cancellation within the test channel, thereby enhancing the signal-to-background noise ratio. On average, the loudspeaker generated a broadband level of 161.8 dB at the measurement points, resulting in a SNR of 41.7 dB.

With respect to attenuation achieved by a single line, in the case of line 1 – whether employing a single active bubble curtain $Lp_{1,1}$ or two active bubble curtains $Lp_{1,2}$ – delivers a broadband IL between 11 dB and 12 dB (Table 8). This suggests that the line can maintain its sound attenuation performance using only one hose. The dual curtain setup $Lp_{1,2}$ yields higher IL at some frequencies but does not notably improve broadband IL overall (Fig. 16).

Considering individual lines attenuation, line 1, line 3, and line 4 exhibit similar broadband IL, each presenting values in the region of 11 dB (Table 8). This observation indicates that the specific distance of a line from either the noise source or the receiver does not significantly influence the broadband IL. Despite the broadband similarities, notable differences in the IL are observed in third-octave frequency bands (Fig. 17). Specifically, the attenuation at low frequencies increases in the case of lines positioned closer to the receiver. This phenomenon can be attributed to the mechanical transmission of noise through the bottom of the test channel, followed by its re-radiation into the water. It is important to note that if this transmission pathway through the channel floor were eliminated, the frequency-dependent IL data would likely converge and become more uniform across the different line positions.

When evaluating the use of two lines, the broadband IL varies between 12.3 dB for configuration $Lp_{1.1} + Lp_{2.1}$ and 15.5 dB for configuration $Lp_{1.1} + Lp_{4.1}$. This suggests that a greater separation between the lines results in a higher IL. Addition of a third line between two active lines leads to a modest increase in total IL, with an enhancement of less than 1 dB. In these cases, the maximum IL reaches 16.2 dB (Table 8 for configurations $Lp_{1.1} + Lp_{2.1} + Lp_{3.1}$ and $Lp_{1.1} + Lp_{3.1} + Lp_{4.1}$).

For the third-octave band IL, single lines offer an IL between 10 dB and 25 dB, ensuring that single lines always achieve at least 10 dB of broadband attenuation. Enhancing the SNR at frequencies below 40 Hz could further raise this minimum attenuation. In contrast, double lines provide the IL from 11 dB to 27 dB and cover a broader frequency range than single lines. Their highest attenuation is between 400 Hz and 2 kHz.

Comparing Table 11 and Table 12 reveals that using a bubble curtain achieving 10 dB IL in each frequency band reduces the distance at which physiological damage thresholds are reached by 78.4 %.

For the LF cetacean group – which includes species like blue, humpback, and fin whales – Table 11 indicates that any individual within 821 m of pile driving activity risks auditory injury (AUD INJ) during a 24-hour exposure. With air bubble curtains providing 10 dB noise attenuation, this risk zone is reduced from 821 m to 177 m (refer to Table 12). For threshold shift (TTS) in the LF group, the affected distance decreases from 5490 m to 1183 m.

In the HF group individuals within distance below 3497 m of pile driving risk TTS, and those within 588 m risk AUD INJ; employing bubble curtains reduces these distances to 753 m and 126 m, respectively (see Table 11 and Table 12).

7. Conclusion

The results of this study demonstrate that the bubble curtains evaluated function effectively as acoustic barriers and can serve as a viable underwater noise mitigation measure, aligning with the new requirements of the Environmental Assessment Service for controlling high energy anthropogenic underwater noise.

Laboratory measurements of IL enabled systematic comparison of different bubble curtain configurations under stable and controlled conditions, thereby avoiding the variability inherent in field measurements.

Across all tested configurations, the air bubble curtains achieved the IL of at least 10 dB in every frequency band. Applying a conservative criterion, the evaluated bubble curtain – when deployed as a mitigation measure for pile driving – would provide a minimum attenuation of 10 dB per frequency band, even in its simplest configuration. This reduction translates into a decrease of at least 78.4 % in the physiological risk area for marine mammals.

It should be noted, however, that attenuation performance in the field may vary depending on factors such as SNR, seabed sound transmission, and the variation of the structural integrity of the bubble curtain with depth and ocean currents.

FUNDINGS

This research did not receive any specific grant from funding agencies in the public, commercial, or not-for-profit sectors.

CONFLICT OF INTEREST

The authors declare that they have no known competing financial interests or personal relationships that could have appeared to influence the work reported in this paper.

AUTHORS' CONTRIBUTIONS

Alfio Yori directed the study, defined the measurement methodology, and wrote the original draft. José Luis Barros performed the analysis and contributed to the interpretation of the data. Rodrigo Torres performed the analysis and the measurements. Felipe Figueroa performed the measurements. All authors reviewed and approved the final manuscript.

References

1. BEELEN S., NIJHOF M., DE JONG C., VAN WIJNGAARDEN L., KRUG D. (2025), Bubble curtains for noise mitigation: One vs two, *The Journal of the Acoustical Society of America*, **157**(2): 1336–1355, <https://doi.org/10.1121/10.0035817>.
2. BELLMANN M.A. (2014), Overview of existing noise mitigation systems for reducing pile-driving noise, [in:] *Inter-Noise and Noise-Con Congress and Conference Proceedings*, **249**: 2544–2554.
3. Department of Arts, Heritage and the Gaeltacht [DAHG] (2014), *Guidance to manage the risk to marine mammals from man-made sound sources in Irish waters*.
4. Department of Planning, Transportation and Infrastructure [DPTI] (2012), *Underwater piling noise guide*, Government of South Australia.
5. DÄHNE M., TOUGAARD J., CARSTENSEN J., ROSE A., NABE-NIELSEN J. (2017), Bubble curtains attenuate noise from offshore wind farm construction and reduce temporary habitat loss for harbour porpoises, *Marine Ecology Progress Series*, **580**: 221–237, <https://doi.org/10.3354/meps12257>.
6. Environmental Assessment Service [SEA] (2022), *Evaluation criteria in the Environmental Impact Assessment System (SEIA): Prediction and evaluation of underwater noise impacts* [in Spanish: *Criterio de evaluación en el sistema de evaluación de impacto ambiental SEIA: Predicción y evaluación de impactos por ruido submarino*].
7. FAHY F.J. (2001), *Foundations of Engineering Acoustics*, Elsevier Press.
8. GÖTTSCHE K.M., JUHL P.M., STEINHAGEN U. (2013), Numerical prediction of underwater noise reduction during offshore pile driving by a small bubble curtain, [in:] *Proceedings Internoise: Noise Control for Quality of Life*.
9. HALL M.V. (1989), A comprehensive model of wind generated bubbles in the ocean and predictions of the effects on sound propagation at frequencies up to 40 kHz, *The Journal of the Acoustical Society of America*, **86**(3): 1103–1117, <https://doi.org/10.1121/1.398102>.
10. JASTRZĘBSKI S. (2007), Application of time reversal technique in shallow water environment, *Archives of Acoustics*, **32**(4(S)): 319–324.
11. Joint Nature Conservation Committee [JNCC] (2010), *Statutory nature conservation agency protocol for minimising the risk injury to marine mammals from piling noise*, Aberdeen, UK.
12. KOSCHINSKI S., LÜDEMANN K. (2013), *Development of Noise Mitigation Measures in Offshore Wind Farm Construction*, Federal Agency for Nature Conservation.
13. KHALILABADI M.R. (2022), 2D modeling of wave propagation in shallow water by the method of characteristics, *Archives of Acoustics*, **47**(3): 407–412, <https://doi.org/10.24425/aoa.2022.142014>.
14. LIPPERT T., AINSLIE M., VON ESTORFF O. (2018), Pile driving acoustics made simple: Damped cylindrical spreading model, *The Journal of the Acoustical Society of America*, **143**(10): 310–317, <https://doi.org/10.1121/1.5011158>.
15. LUCKE K., LEPPER P.A., BLANCHET M.A., SIEBERT U. (2011), The use of an air bubble curtain to reduce the received sound levels for harbor porpoises (*Phocoena phocoena*), *The Journal of the Acoustical Society of America*, **130**(5): 3406–3412, <https://doi.org/10.1121/1.3626123>.

16. LUCKE K., SIEMENSMA M. (2013), *International regulations on the impact of pile driving noise on marine mammals – A literature review*, Institute for Marine Resources and Ecosystem Studies.
17. MCKENZIE C. (2015), *Smålandsfarvandet offshore wind farm underwater noise*, Technical report, Energinet.dk.
18. MERCK T., WERNER S., KOSCHINSKI S., LÜDEMANN K. (2014), *Inventory of measures to mitigate the emission and environmental impact of underwater noise*, Technical report, OSPAR Commission.
19. MMO (2015), *Modelled mapping of continuous underwater noise generated by activities. A report produced for the Marine Management Organization*, MMO Project No: 1097.
20. MOLNAR M., BUEHLER D., OESTMAN R., REYFF J., POMMERENCK K., MITCHELL B. (2020), *Technical guidance for the assessment of hydroacoustic effects of pile driving on fish*, Division of Environmental Analysis California Department of Transportation.
21. MÖSER M., BARROS J.L. (2004), *Acoustic Engineering, Theory and Applications* [in Spanish: *Ingeniería Acústica, Teoría y Aplicaciones*], Springer.
22. National Marine Fisheries Service (2021), *Guidelines for non-lethally deterring marine mammals*.
23. National Marine Fisheries Service (2024), *Update to: Technical guidance for assessing the effects of anthropogenic sound on marine mammal hearing (Version 3.0): Underwater and in-air criteria for onset of auditory injury and temporary threshold shifts*, U.S. Department of Commerce, NOAA. NOAA Technical Memorandum NMFS-OPR-71.
24. NEDWELL J.R., EDWARDS B., TURNPENNY A.W.H., GORDON J. (2004), *Fish and marine mammal audiograms: A summary of available information*, Subacoustech Report ref: 534R0214.
25. NEDWELL J.R. *et al.* (2007), *A validation of the dB_{ht} as a measure of the behavioural and auditory effects of underwater noise*, Subacoustech Report No. 534R1231.
26. NEHLS G., BETKE K., ECKELMANN S., ROS M. (2007), *Assessment and costs of potential engineering solutions for the mitigation of the impacts of underwater noise arising from the construction of offshore windfarms*, (Report No. ENG-01-2007), Report by BioConsult SH. Report for Collaborative Offshore Wind Research into the Environment (COWRIE).
27. NEHLS G., ROSE A., DIEDERICHS A., BELLMANN M., PEHLKE H. (2015), *Noise mitigation during pile driving efficiently reduces disturbance of marine mammals*, *Advances in Experimental Medicine and Biology*, **875**: 755–762, https://doi.org/10.1007/978-1-4939-2981-8_92.
28. NOVARINI J.C., KEIFFER R.S., NORTON G.V. (1998), *A model for variations in the range and depth dependence of the sound speed and attenuation induced by bubble clouds under wind-driven sea surfaces*, *IEEE Journal of Oceanic Engineering*, **23**(4): 423–438, <https://doi.org/10.1109/48.725236>.
29. PARVIN S.J., NEDWELL J.R. (1995), *Underwater sound perception and the development of an underwater noise weighting scale*, *Underwater Technology*, **21**(1): 12–19, <https://doi.org/10.3723/175605495783328836>.
30. QI C., HU Z., WANG S., JIANG Z., WU H., YIN Z. (2021), *Study on the propagation law of water hammer wave in underwater blasting and the reducing effect of air curtain on water hammer wave*, *Shock and Vibration*, <https://doi.org/10.1155/2021/9994071>.
31. RICHARDSON W.J., GREENE C.R., MALME C.I., THOMSON D.H. (1995), *Marine Mammals and Noise*, Academic Press Inc., New York.
32. ROBINSON S.P., LEPPER P.A., HAZELWOOD R.A. (2014), *Good practice guide for underwater noise measurement*, National Measurement Office, Marine Scotland, The Crown Estate, NPL Good Practice Guide No. 133.
33. RODKIN R., POMMERENCK K. (2014), *Caltrans compendium of underwater sound data from pile driving*, [in:] *Inter-Noise 2014*.
34. RUSTEMEIER J., GRIESSMANN T., ROLFES R. (2012), *Underwater sound mitigation of bubble curtains with different bubble size distributions*, *Proceedings of Meetings on Acoustics*, **17**(1): 070055, <https://doi.org/10.1121/1.4772936>.

35. STRIETMAN W.J., MICHELS R., LEEMANS E. (2018), *Measures to reduce underwater noise and beach litter: An assessment of potential additional measures for the Netherlands*, Wageningen Economic Research, Report 2018-087, <https://doi.org/10.18174/457443>.
36. TSOUVALAS A. (2020), Underwater noise emission due to offshore pile installation: A review, *Energies*, **13**(12): 3037, <https://doi.org/10.3390/en13123037>.
37. URICK R.J. (2010), *Principle of Underwater Sound*, 3rd ed., Peninsula Publishing.
38. URS (2011), *Report marine noise assessment*, Northern Territory Department of Lands and Planning, Australia.
39. WERNER S. (2010), *Towards a precautionary approach for regulation of noise introduction in the marine environment from pile driving* [in German], Federal Environmental Agency, Stralsund, Germany.
40. WÜRSIG B., GREENE C.R., JEFFERSON T.A. (2000), Development of an air bubble curtain to reduce underwater noise of percussive piling, *Marine Environmental Research*, **49**(1): 79–93, [https://doi.org/10.1016/S0141-1136\(99\)00050-1](https://doi.org/10.1016/S0141-1136(99)00050-1).
41. YORI A.F. (2018), Underwater assessment of anthropogenic noise sources using a field recording method, *Acta Acustica United with Acustica*, **104**(1): 13–24, <https://doi.org/10.3813/AAA.919141>.